



# Каталог на продукцию Lake Monitors

По вопросам продаж и поддержки обращайтесь: [aen@nt-rt.ru](mailto:aen@nt-rt.ru)

[www.lake.nt-rt.ru](http://www.lake.nt-rt.ru)

Архангельск (8182)63-90-72,  
Астана+7(7172)727-132,  
Белгород(4722)40-23-64,  
Брянск(4832)59-03-52,  
Владивосток(423)249-28-31,  
Волгоград(844)278-03-48,  
Вологда(8172)26-41-59,  
Воронеж(473)204-51-73,  
Екатеринбург(343)384-55-89,  
Иваново(4932)77-34-06,  
Ижевск(3412)26-03-58,  
Казань(843)206-01-48,  
Калининград(4012)72-03-81,  
Калуга(4842)92-23-67,  
Кемерово(3842)65-04-62,  
Киров(8332)68-02-04,

Краснодар(861)203-40-90,  
Красноярск(391)204-63-61,  
Курск(4712)77-13-04,  
Липецк(4742)52-20-81,  
Магнитогорск(3519)55-03-13,  
Москва(495)268-04-70,  
Мурманск(8152)59-64-93,  
НабережныеЧелны(8552)20-53-41,  
НижнийНовгород(831)429-08-12,  
Новокузнецк(3843)20-46-81,  
Новосибирск(383)227-86-73,  
Орел(4862)44-53-42,  
Оренбург(3532)37-68-04,  
Пенза(8412)22-31-16,  
Пермь(342)205-81-47,  
Ростов-на-Дону(863)308-18-15,

Рязань(4912)46-61-64,  
Самара(846)206-03-16,  
Санкт-Петербург(812)309-46-40,  
Саратов(845)249-38-78,  
Смоленск(4812)29-41-54,  
Сочи(862)225-72-31,  
Ставрополь(8652)20-65-13,  
Тверь(4822)63-31-35,  
Томск(3822)98-41-53,  
Тула(4872)74-02-29,  
Тюмень(3452)66-21-18,  
Ульяновск(8422)24-23-59,  
Уфа(347)229-48-12,  
Челябинск(351)202-03-61,  
Череповец(8202)49-02-64,  
Ярославль(4852)69-52-93,



▶ VARIABLE AREA **FLOW METERS**  
**INSTRUMENTATION**

# BASIC INLINE LIQUID VARIABLE AREA FLOW METER

Ideal for monitoring pump performance and media flows through hydraulic circuits and cooling systems.



## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

±2.0% of full scale

### Repeatability

±1% of full scale

### Flow Measuring Range

0.1–150 GPM (0.5–550 LPM)

### Maximum Operating Pressure

Aluminum and brass meters: 3500 PSIG (240 Bar)

Stainless steel meters: 6000 PSIG (410 Bar)

### Maximum Operating Temperature

240°F (116°C) Note: for operation to 600°F (316°C), see our High Temperature Data sheet.

### Standard Calibration Fluids

Oil meters: DTE 25® @ 110°F (43°C), 0.873 sg

Water meters: tap water @ 70°F (21°C), 1.0 sg

### Filtration Requirements

74 micron filter or 200 mesh screen minimum

### Viscosity

Standard viscosities up to 110 cSt. For viscosities between 110 to 430 cSt contact factory.

DTE 25 is a registered trademark of Exxon Mobil.

## BENEFITS

### Choice of Materials

Select from aluminum, brass or stainless steel to meet system and liquid requirements.

### Unrestricted Mounting

Allows for horizontal, vertical or inverted installation and does not require straight plumbing on inlet or outlet.

### Superior Exterior Design

Weather-tight for use outdoors and/or on systems where wash downs are required.

### Rugged and Reliable

These meters are constructed with all metal pressure vessels that allow safe and permanent installation.

### High Pressure Operation

The magnetically coupled follower design allows operation to 6000 PSIG.

### Multiple Ports Available

Standard selection of NPT, SAE and BSPP ports reduces the amount of adapters required for installation.

## MATERIALS OF CONSTRUCTION (NON-WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Window Tube	Polycarbonate	Polycarbonate	Polycarbonate
Window Seals	Buna-N® (STD), PTFE	Buna-N® (STD), PTFE	Buna-N® (STD), PTFE

## MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Casing & End Ports	Anodized Aluminum	Brass	Stainless Steel
Seals	Buna-N® (STD), EPR, FKM or FFKM	Buna-N® (STD), EPR, FKM or FFKM	FKM with PTFE backup (STD), Buna-N®, EPR or FFKM
Transfer Magnet	PTFE coated Alnico	PTFE coated Alnico	PTFE coated Alnico
All other internal parts	Stainless Steel	Stainless Steel	Stainless Steel

Buna-N is a registered trademark of Chemische Werke Huls.

# BASIC INLINE LIQUID VARIABLE AREA FLOW METER

Ideal for monitoring pump performance and media flows through hydraulic circuits and cooling systems.

## PART NUMBER GUIDE

B     -       -         -        

### BASIC

### PORT SIZE RANGE

1/4" - 1/2" = 3  
 3/4" - 1" = 4  
 1-1/4" - 2" = 5

### MATERIAL

Aluminum = A  
 Brass = B  
 Stainless Steel = S

### MAX. PRESSURE RATING

3500 psig (liquids, aluminum & brass) = 6  
 6000 psig (liquids, stainless steel) = 7

### FLUID MEDIA

Oil @ 0.873 specific gravity = H  
 Water @ 1.0 specific gravity = W

*Note: For special scales consult factory.*

### PORTING/THREAD TYPE

(all female)

1/4" NPTF, dry seal	3 only = <span style="border: 1px solid black; padding: 2px;">S</span>
3/8" NPTF, dry seal	3 only = <span style="border: 1px solid black; padding: 2px;">A</span>
1/2" NPTF, dry seal	3 only = <span style="border: 1px solid black; padding: 2px;">B</span>
3/4" NPTF, dry seal	4 only = <span style="border: 1px solid black; padding: 2px;">C</span>
1" NPTF, dry seal	4 only = <span style="border: 1px solid black; padding: 2px;">D</span>
#6 SAE, O-ring seal	3 only = <span style="border: 1px solid black; padding: 2px;">E</span>
#8 SAE, O-ring seal	3 only = <span style="border: 1px solid black; padding: 2px;">F</span>
#10 SAE, O-ring seal	3 only = <span style="border: 1px solid black; padding: 2px;">G</span>
#12 SAE, O-ring seal	4 only = <span style="border: 1px solid black; padding: 2px;">H</span>
#16 SAE, O-ring seal	4 only = <span style="border: 1px solid black; padding: 2px;">J</span>
1-1/4" NPTF, dry seal	5 only = <span style="border: 1px solid black; padding: 2px;">K</span>
1-1/2" NPTF, dry seal	5 only = <span style="border: 1px solid black; padding: 2px;">L</span>
2" NPTF, dry seal	5 only = <span style="border: 1px solid black; padding: 2px;">M</span>
#20 SAE, O-ring seal	5 only = <span style="border: 1px solid black; padding: 2px;">N</span>
#24 SAE, O-ring seal	5 only = <span style="border: 1px solid black; padding: 2px;">P</span>
#32 SAE, O-ring seal	5 only = <span style="border: 1px solid black; padding: 2px;">Q</span>
1/4" BSPP	3 only = <span style="border: 1px solid black; padding: 2px;">&amp;</span>
3/8" BSPP	3 only = <span style="border: 1px solid black; padding: 2px;">R</span>
1/2" BSPP	3 only = <span style="border: 1px solid black; padding: 2px;">T</span>
3/4" BSPP	4 only = <span style="border: 1px solid black; padding: 2px;">U</span>
1" BSPP	4 only = <span style="border: 1px solid black; padding: 2px;">V</span>
1-1/4" BSPP	5 only = <span style="border: 1px solid black; padding: 2px;">W</span>
1-1/2" BSPP	5 only = <span style="border: 1px solid black; padding: 2px;">Y</span>
2" BSPP	5 only = <span style="border: 1px solid black; padding: 2px;">X</span>

*Note: SAE porting not available in Brass. Consult factory for SAE brass meter requirements.*

### SPECIAL SCALE/CUSTOM PRODUCT

### OPTIONAL FLOW DIRECTIONS


Standard Flow, Uni-Directional =      
 Reverse Flow = R F  
 Bi-Directional Flow (For bi-directional flow refer to bi-directional data sheet. Please consult factory for availability and delivery time.)

### FLOW RANGES

Liquid	Size	3 only =	3 & 4 =	3 & 4 =	3 & 4 =	3 & 4 =	4 only =	4 & 5 =	4 only =	4 only =	4 & 5 =	5 only =	5 only =	5 only =	5 only =
0.1-1.0 GPM	0.5-4 LPM	<span style="border: 1px solid black; padding: 2px;">0</span> <span style="border: 1px solid black; padding: 2px;">1</span>	<span style="border: 1px solid black; padding: 2px;">0</span> <span style="border: 1px solid black; padding: 2px;">2</span>	<span style="border: 1px solid black; padding: 2px;">0</span> <span style="border: 1px solid black; padding: 2px;">5</span>	<span style="border: 1px solid black; padding: 2px;">1</span> <span style="border: 1px solid black; padding: 2px;">0</span>	<span style="border: 1px solid black; padding: 2px;">1</span> <span style="border: 1px solid black; padding: 2px;">5</span>	<span style="border: 1px solid black; padding: 2px;">2</span> <span style="border: 1px solid black; padding: 2px;">0</span>	<span style="border: 1px solid black; padding: 2px;">2</span> <span style="border: 1px solid black; padding: 2px;">5</span>	<span style="border: 1px solid black; padding: 2px;">3</span> <span style="border: 1px solid black; padding: 2px;">0</span>	<span style="border: 1px solid black; padding: 2px;">4</span> <span style="border: 1px solid black; padding: 2px;">0</span>	<span style="border: 1px solid black; padding: 2px;">5</span> <span style="border: 1px solid black; padding: 2px;">0</span>	<span style="border: 1px solid black; padding: 2px;">7</span> <span style="border: 1px solid black; padding: 2px;">5</span>	<span style="border: 1px solid black; padding: 2px;">8</span> <span style="border: 1px solid black; padding: 2px;">8</span>	<span style="border: 1px solid black; padding: 2px;">9</span> <span style="border: 1px solid black; padding: 2px;">9</span>	
0.2-2.0 GPM	1-8 LPM														
0.5-5.0 GPM	2-19 LPM														
1-10 GPM	5-37.5 LPM														
1-15 GPM	5-55 LPM														
2-20 GPM	10-75 LPM														
2-25 GPM	10-95 LPM														
4-30 GPM	15-115 LPM														
4-40 GPM	20-150 LPM														
6-50 GPM	20-190 LPM														
6-75 GPM	30-280 LPM														
10-100 GPM	50-375 LPM														
25-150 GPM	100-550 LPM														

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4	Series 5	Series 5 (2" port only)
A	1-7/8" (48mm)	2-3/8" (60 mm)	3-1/2" (90mm)	3-1/2" (90mm)
B	6-9/16" (167mm)	7-5/32" (182mm)	10-1/8" (258mm)	12-5/8" (322mm)

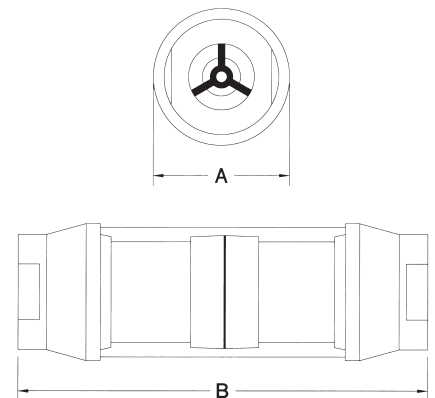

# BI-DIRECTIONAL VARIABLE AREA FLOW METER

Ideal for monitoring pump performance and media flows through hydraulic circuits and cooling systems.



## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

±4.0% of full scale

### Repeatability

±1% of full scale

### Flow Measuring Range

0.5-100 GPM (2-350 LPM)

### Maximum Operating Pressure

Aluminum and brass meters: 3500 PSIG (240 Bar)  
Stainless steel meters: 6000 PSIG (410 Bar)

### Maximum Operating Temperature

240°F (116°C) Note: for operation to 600°F (316°C), see our High Temperature Data sheet.

### Standard Calibration Fluids

Oil meters: DTE 25® @ 110°F (43°C), 0.873 sg  
Water meters: tap water @ 70°F (21°C), 1.0 sg

### Filtration Requirements

74 micron filter or 200 mesh screen minimum

### Viscosity

Viscosities up to 110 cSt

DTE 25 is a registered trademark of Exxon Mobil.

## BENEFITS

### Choice of Materials

Select from aluminum, brass or stainless steel to meet system and liquid requirements.

### Unrestricted Mounting

Allows for horizontal, vertical or inverted installation and does not require straight plumbing on inlet or outlet.

### Bi-Directional

Measures bi-directional flow measurement for liquids.

### Rugged and Reliable

These meters are constructed with all metal pressure vessels that allow safe & permanent installation.

### High Pressure Operation

The magnetically coupled follower design allows operation to 6000 PSIG.

### Multiple Ports Available

Standard selection of NPT, SAE and BSPP ports reduces the amount of adapters required for installation.

## MATERIALS OF CONSTRUCTION (NON-WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Window Tube	Polycarbonate	Polycarbonate	Polycarbonate
Window Seals	Buna-N® (STD), PTFE	Buna-N® (STD), PTFE	Buna-N® (STD), PTFE

## MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Casing & End Ports	Anodized Aluminum	Brass	Stainless Steel
Seals	Buna-N® (STD), EPR, FKM or FFKM	Buna-N® (STD), EPR, FKM or FFKM	FKM with PTFE backup (STD), Buna-N®, EPR or FFKM
Transfer Magnet	PTFE coated Alnico	PTFE coated Alnico	PTFE coated Alnico
All other internal parts	Stainless Steel	Stainless Steel	Stainless Steel

Buna-N is a registered trademark of Chemische Werke Huls.

# BI-DIRECTIONAL VARIABLE AREA FLOW METER

Ideal for monitoring pump performance and media flows through hydraulic circuits and cooling systems.

## PART NUMBER GUIDE

B     —       —     B I —        

**BASIC**

**PORT SIZE RANGE**

1/4" - 1/2" = 3

3/4" - 1" = 4

1-1/4 - 2" = 5

**MATERIAL**

Aluminum = A

Brass = B

Stainless Steel = S

**MAX. PRESSURE RATING**

3500 psig (liquids, aluminum & brass) = 6

6000 psig (liquids, stainless steel) = 7

**FLUID MEDIA**

Oil @ 0.873 specific gravity = H

Water @ 1.0 specific gravity = W

Note: For special scales consult the factory.

**PORTING/THREAD TYPE**

(all female)

1/4" NPTF, dry seal	3 only	=	<span style="border: 1px solid black; padding: 2px;">S</span>
3/8" NPTF, dry seal	3 only	=	<span style="border: 1px solid black; padding: 2px;">A</span>
1/2" NPTF, dry seal	3 only	=	<span style="border: 1px solid black; padding: 2px;">B</span>
3/4" NPTF, dry seal	4 only	=	<span style="border: 1px solid black; padding: 2px;">C</span>
1" NPTF, dry seal	4 only	=	<span style="border: 1px solid black; padding: 2px;">D</span>
#6 SAE, O-ring seal	3 only	=	<span style="border: 1px solid black; padding: 2px;">E</span>
#8 SAE, O-ring seal	3 only	=	<span style="border: 1px solid black; padding: 2px;">F</span>
#10 SAE, O-ring seal	3 only	=	<span style="border: 1px solid black; padding: 2px;">G</span>
#12 SAE, O-ring seal	4 only	=	<span style="border: 1px solid black; padding: 2px;">H</span>
#16 SAE, O-ring seal	4 only	=	<span style="border: 1px solid black; padding: 2px;">J</span>
1-1/4" NPTF, dry seal	5 only	=	<span style="border: 1px solid black; padding: 2px;">K</span>
1-1/2" NPTF, dry seal	5 only	=	<span style="border: 1px solid black; padding: 2px;">L</span>
2" NPTF, dry seal	5 only	=	<span style="border: 1px solid black; padding: 2px;">M</span>
#20 SAE, O-ring seal	5 only	=	<span style="border: 1px solid black; padding: 2px;">N</span>
#24 SAE, O-ring seal	5 only	=	<span style="border: 1px solid black; padding: 2px;">P</span>
#32 SAE, O-ring seal	5 only	=	<span style="border: 1px solid black; padding: 2px;">Q</span>
1/4" BSPP	3 only	=	<span style="border: 1px solid black; padding: 2px;">&amp;</span>
3/8" BSPP	3 only	=	<span style="border: 1px solid black; padding: 2px;">R</span>
1/2" BSPP	3 only	=	<span style="border: 1px solid black; padding: 2px;">T</span>
3/4" BSPP	4 only	=	<span style="border: 1px solid black; padding: 2px;">U</span>
1" BSPP	4 only	=	<span style="border: 1px solid black; padding: 2px;">V</span>
1-1/4" BSPP	5 only	=	<span style="border: 1px solid black; padding: 2px;">W</span>
1-1/2" BSPP	5 only	=	<span style="border: 1px solid black; padding: 2px;">Y</span>
2" BSPP	5 only	=	<span style="border: 1px solid black; padding: 2px;">X</span>

Note: SAE porting not available in Brass. Consult factory for SAE brass meter requirements.

**CUSTOM PRODUCT**

**OPTIONAL FLOW DIRECTIONS**


Bi-Directional Flow = B I

**FLOW RANGES**

<b>Liquid</b>		<b>Size</b>	
0.5-5.0 GPM	2-19 LPM	3 only	= <span style="border: 1px solid black; padding: 2px;">0</span> <span style="border: 1px solid black; padding: 2px;">5</span>
1-10 GPM	5-37.5 LPM	3 & 4	= <span style="border: 1px solid black; padding: 2px;">1</span> <span style="border: 1px solid black; padding: 2px;">0</span>
1-15 GPM	5-55 LPM	3 & 4	= <span style="border: 1px solid black; padding: 2px;">1</span> <span style="border: 1px solid black; padding: 2px;">5</span>
2-20 GPM	10-75 LPM	4 only	= <span style="border: 1px solid black; padding: 2px;">2</span> <span style="border: 1px solid black; padding: 2px;">0</span>
4-30 GPM	15-115 LPM	4 only	= <span style="border: 1px solid black; padding: 2px;">3</span> <span style="border: 1px solid black; padding: 2px;">0</span>
6-50 GPM	20-190 LPM	5 only	= <span style="border: 1px solid black; padding: 2px;">5</span> <span style="border: 1px solid black; padding: 2px;">0</span>
6-75 GPM	30-280 LPM	5 only	= <span style="border: 1px solid black; padding: 2px;">7</span> <span style="border: 1px solid black; padding: 2px;">5</span>
10-100 GPM	50-375 LPM	5 only	= <span style="border: 1px solid black; padding: 2px;">8</span> <span style="border: 1px solid black; padding: 2px;">8</span>

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4	Series 5	Series 5 (2" port only)
A	1-7/8" (48mm)	2-3/8" (60 mm)	3-1/2" (90mm)	3-1/2" (90mm)
B	6-9/16" (167mm)	7-5/32" (182mm)	10-1/8" (258mm)	12-5/8" (322mm)

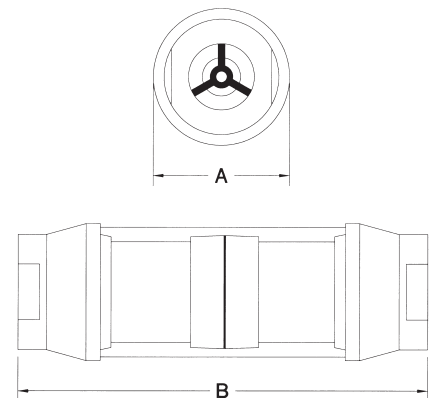

# HIGH TEMPERATURE FLOW METER

Enables flow monitoring of barrel heating fluids, thermal transfer fluids such as Syltherm® coolant flows, hydraulic circuits and sub-circuits.



## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

±2.0% of full scale

### Repeatability

±1% of full scale

### Flow Measuring Range

0.1-150 GPM (0.4-560 LPM)

### Maximum Operating Pressure<sup>1</sup>

#### Liquids

Aluminum and brass meters: 3500 PSIG (240 Bar)

Stainless steel meters: 6000 PSIG (410 Bar)

#### Air/Gas

Aluminum and brass meters: 600 PSIG (40 Bar)

Stainless steel meters: 1000 PSIG (69 Bar)

### Maximum Operating Temperature

H-Series 400°F (204°C)

J-Series 600°F (315°C)

### Standard Calibration Fluids

Oil meters: DTE 25® @ 110°F (43°C), 0.873 sg

Water meters: water @ 70°F (21°C), 1.0 sg

Air meters: air @ 70°F (21°C), 1.0 sg & 100 PSIG (6.8 bar)

### Filtration Requirements

74 micron filter or 200 mesh screen minimum

### Viscosity

Standard viscosities up to 110 cSt. For viscosities between 110 to 430 cSt contact factory.

<sup>1</sup>Note: See Temperature/Pressure De-rating Chart on back. DTE 25 is a registered trademark of Exxon Mobil.

## MATERIALS OF CONSTRUCTION (NON-WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Window Tube	Pyrex®	Pyrex®	Pyrex®
Window Seals	PTFE	PTFE	PTFE

Pyrex is a registered trademark of Corning Incorporated.

## BENEFITS

### Choice of Materials

Select from aluminum, brass or stainless steel to meet system and media compatibility requirements.

### Unrestricted Mounting

Allows for horizontal, vertical or inverted installation and does not require straight plumbing on inlet or outlet.

### Multiple Ports Available

Standard selection of NPT, SAE and BSPP ports reduces the amount of adapters required for installation.

### Bi-Directional and Reverse Flow Option Offered


High temperature monitors are also available in bidirectional and reverse flow versions. Contact the factory for more information.

## MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Casing and End Ports	Anodized Aluminum	Brass	Stainless Steel
Seals			
H-Series (400°F)	FKM w/ PTFE backup	FKM w/ PTFE backup	FKM w/ PTFE backup
J-Series (600°F)	FFKM w/ PTFE backup	FFKM w/ PTFE backup	FFKM w/ PTFE backup
Transfer Magnet	PTFE coated Alnico	PTFE coated Alnico	PTFE coated Alnico
All other internal parts	Stainless Steel	Stainless Steel	Stainless Steel

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4	Series 5	Series 5 (2" port only)
A	1-7/8" (48mm)	2-3/8" (60mm)	3-1/2" (90mm)	3-1/2" (90mm)
B	6-9/16" (167 mm)	7-5/32" (182mm)	10-1/8" (258mm)	12-5/8" (322mm)



# HIGH TEMPERATURE FLOW METERS

Enables flow monitoring of barrel heating fluids, thermal transfer fluids such as Syltherm® coolant flows, hydraulic circuits and sub-circuits.

## PART NUMBER GUIDE

**METER STYLE**

400°F In-line =

600°F In-line =

**PORTING/THREAD TYPE**

(all female)

1/4" NPTF, dry seal	3 only	=	<input type="text" value="S"/>
3/8" NPTF, dry seal	3 only	=	<input type="text" value="A"/>
1/2" NPTF, dry seal	3 only	=	<input type="text" value="B"/>
3/4" NPTF, dry seal	4 only	=	<input type="text" value="C"/>
1" NPTF, dry seal	4 only	=	<input type="text" value="D"/>
#6 SAE, O-ring seal	3 only	=	<input type="text" value="E"/>
#8 SAE, O-ring seal	3 only	=	<input type="text" value="F"/>
#10 SAE, O-ring seal	3 only	=	<input type="text" value="G"/>
#12 SAE, O-ring seal	4 only	=	<input type="text" value="H"/>
#16 SAE, O-ring seal	4 only	=	<input type="text" value="J"/>
1-1/4" NPTF, dry seal	5 only	=	<input type="text" value="K"/>
1-1/2" NPTF, dry seal	5 only	=	<input type="text" value="L"/>
2" NPTF, dry seal	5 only	=	<input type="text" value="M"/>
#20 SAE, O-ring seal	5 only	=	<input type="text" value="N"/>
#24 SAE, O-ring seal	5 only	=	<input type="text" value="P"/>
#32 SAE, O-ring seal	5 only	=	<input type="text" value="Q"/>
1/4" BSPP	3 only	=	<input type="text" value="R"/>
3/8" BSPP	3 only	=	<input type="text" value="R"/>
1/2" BSPP	3 only	=	<input type="text" value="T"/>
3/4" BSPP	4 only	=	<input type="text" value="U"/>
1" BSPP	4 only	=	<input type="text" value="V"/>
1-1/4" BSPP	5 only	=	<input type="text" value="W"/>
1-1/2" BSPP	5 only	=	<input type="text" value="Y"/>
2" BSPP	5 only	=	<input type="text" value="X"/>

**SPECIAL SCALE/CUSTOM PRODUCT**

**OPTIONAL FLOW DIRECTIONS**

Standard Flow, Uni-Directional =

Reverse Flow =

Bi-Directional Flow =

*Note: See bi-directional datasheet for available bi-directional ranges.*

**PORT SIZE RANGE**

1/4" - 1/2" =

3/4" - 1" =

1-1/4" - 2" =

**MATERIAL**

Aluminum =

Brass =

Stainless Steel =

**MAX. PRESSURE RATING**

600 psig (air/gas, stainless steel) =

1000 psig (air/gas, aluminum & brass) =

3500 psig (liquids, aluminum & brass) =

6000 psig (liquids, stainless steel) =

**FLUID MEDIA**

Air & Gases =

Oil & 0.873 specific gravity =

Water & 1.0 specific gravity =

**FLOW RANGES**


Liquid	Air	Size	=	<input type="text" value=""/>	<input type="text" value=""/>
0.1-1.0 GPM	2-12 SCFM	3 only	=	<input type="text" value="0"/>	<input type="text" value="1"/>
0.2-2.0 GPM	4-23 SCFM	3 & 4	=	<input type="text" value="0"/>	<input type="text" value="2"/>
0.5-5.0 GPM	5-50 SCFM	3 & 4	=	<input type="text" value="0"/>	<input type="text" value="5"/>
1-10 GPM	10-100 SCFM	3 & 4	=	<input type="text" value="1"/>	<input type="text" value="0"/>
1-15 GPM	25-150 SCFM	3 & 4	=	<input type="text" value="1"/>	<input type="text" value="5"/>
2-20 GPM	20-215 SCFM	4 only	=	<input type="text" value="2"/>	<input type="text" value="0"/>
2-25 GPM	20-250 SCFM	4 & 5	=	<input type="text" value="2"/>	<input type="text" value="5"/>
3-30 GPM	30-330 SCFM	4 only	=	<input type="text" value="3"/>	<input type="text" value="0"/>
4-40 GPM	30-400 SCFM	4 only	=	<input type="text" value="4"/>	<input type="text" value="0"/>
5-50 GPM	40-500 SCFM	4 only	=	<input type="text" value="5"/>	<input type="text" value="0"/>
5-50 GPM	30-470 SCFM	5 only	=	<input type="text" value="5"/>	<input type="text" value="0"/>
8-75 GPM	30-750 SCFM	5 only	=	<input type="text" value="7"/>	<input type="text" value="5"/>
10-100 GPM	150-900 SCFM	5 only	=	<input type="text" value="8"/>	<input type="text" value="8"/>
20-150 GPM	150-1300 SCFM	5 only	=	<input type="text" value="9"/>	<input type="text" value="9"/>

*Note: For special scales consult the factory.*


*Note: SAE porting not available in Brass. Consult factory for SAE brass monitor requirements.*

## TEMPERATURE DE-RATING FOR ALUMINUM & BRASS METERS

### AIR & GAS

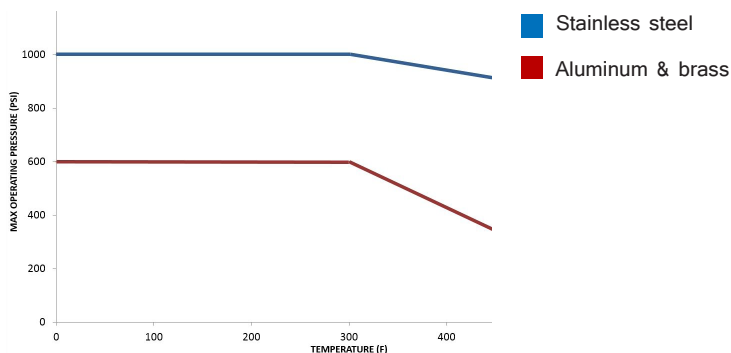

### LIQUID

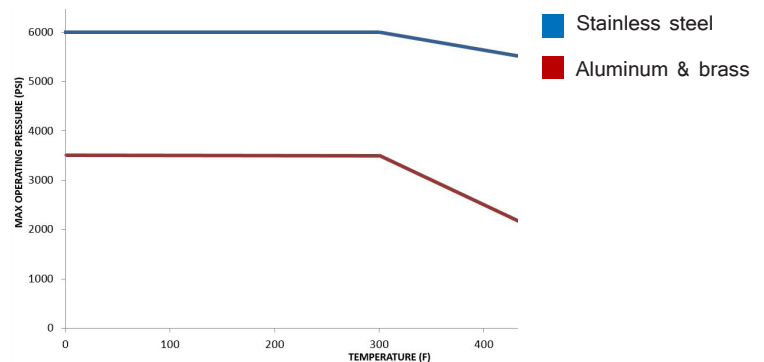



# CLEARVIEW VALUE FLOW METER

Economical way to monitor municipal pressure water flows, observe case drain flows and verify pump outputs.

## TECHNICAL SPECIFICATIONS

**Measuring Accuracy**  
±2% of full scale

**Repeatability**  
±1% of full scale

**Flow Measuring Range**  
1-30 GPM (5-110 LPM)

**Maximum Operating Pressure**  
325 PSIG (22.4 Bar)

**Maximum Operating Temperature**  
ClearView H2O 200°F (93°C) (for water)  
ClearView+ 250°F (121°C)

**Standard Calibration Fluids**

Oil monitors: DTE 25® @110°F (43°C),  
0.873 sg

Water monitors: tap water @70°F (21°C),  
1.0 sg

**Filtration Requirements**

74 micron filter or 200 mesh screen  
minimum



## MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

	ClearView H2O	ClearView +
End Ports	Brass, Ryton®	Brass, Ryton®
Seals	Viton	Viton
Spring	Stainless Steel	Stainless Steel
Body	Polycarbonate	Polysulfone
Indicator	Polysulfone	Polysulfone

*Ryton is a registered trademark of the Chevron Phillips Chemical Company LLC. Buna-N is a registered trademark of Chemische Werke Huls. DTE is a registered trademark of Exxon Mobil.*

## BENEFITS

### Visual Inspection of Fluid

The transparent body allows for visual inspection of fluid conditions. Diagnose problems at a glance.

### Unrestricted Mounting

Allows for horizontal, vertical or inverted installation and does not require straight plumbing on inlet or outlet.

### Compact Design

Measures less than 8" long and 2-7/16" diameter with a rigid tube and union nut design.

### Multiple Materials and Calibrations Available



With a variety of wetted materials of construction and media calibrations, the meter will be well suited to your process.

### Sensing Method Assures Accuracy

The proven variable area piston metering assembly provides accurate, dependable flow rate indication.

## MECHANICAL - SIZE CODE


DIM	1/2" Female	3/4" Female	1" Female
A	2-7/16" (62 mm)	2-7/16" (62 mm)	2-7/16" (62 mm)
B - Brass	7-5/32" (182 mm)	7-9/16" (192 mm)	7-9/16" (192 mm)
B - Ryton	7-9/16" (192 mm)	7-9/16" (192 mm)	7-9/16" (192 mm)
Port Type	NPTF, BSPP	NPTF, BSPP	NPTF, BSPP
DIM	1/2" Male	3/4" Male	1" Male
B - Brass	7-21/32" (194 mm)	8-1/64" (204 mm)	8-3/16" (208 mm)
Port Type	NPTF	NPTF	NPTF

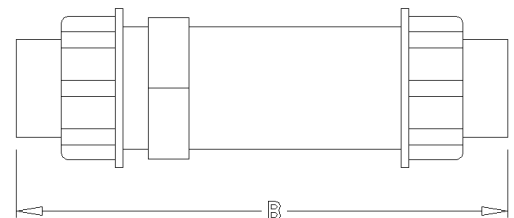


# CLEARVIEW VALUE FLOW METER

Economical way to monitor municipal pressure water flows, observe case drain flows and verify pump outputs.

## PART NUMBER GUIDE

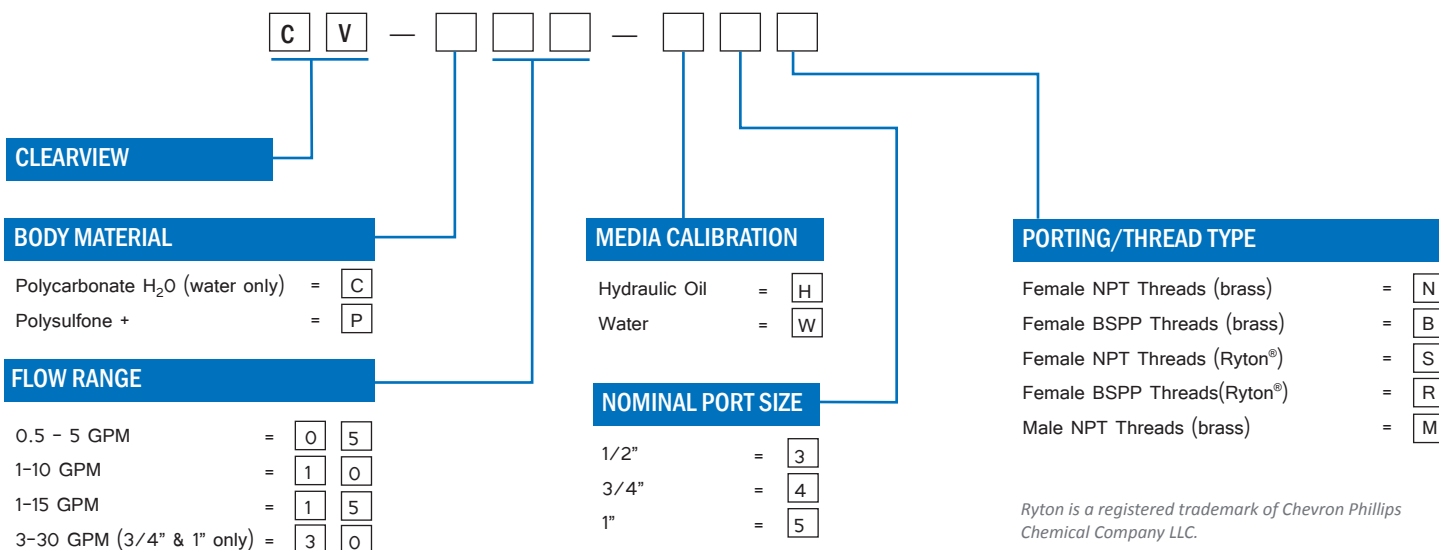

## TYPICAL PRESSURE DIFFERENTIALS

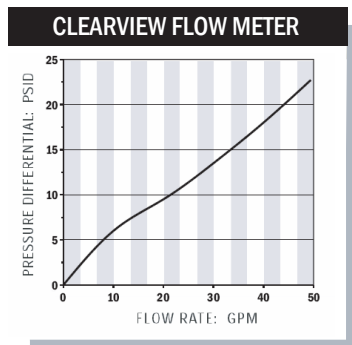

# PHOSPHATE ESTER FLOW METERS

Compatible with aviation lubricants such as Skydrol®, and fire-retardant fluids such as Pydraul®, Fyrquil® and Houghton 900 series.



## TECHNICAL SPECIFICATIONS

**Measuring Accuracy**  
±2.0% of full scale

**Repeatability**  
±1% of full scale

**Flow Measuring Range**  
0.1-130 GPM (0.5 - 500 LPM)

**Maximum Operating Pressure**  
Aluminum and brass meters: 3500 PSIG (240 Bar)  
Stainless steel meters: 6000 PSIG (410 Bar)

**Maximum Operating Temperature**  
240°F (116°C)

**Standard Calibration Fluids**  
Tap water @ 70°F (21°C) 1.0 s.g.  
Meters are density corrected to 1.145 sg

**Filtration Requirements**  
74 micron filter or 200 mesh screen minimum

## BENEFITS

### Choice of Materials

Select from aluminum, brass or stainless steel to meet system and liquid requirements.

### Unrestricted Mounting

Allows for horizontal, vertical or inverted installation and does not require straight plumbing on inlet or outlet.

### Multi-Use

Factory calibrated for phosphate esters, these versatile meters can be used to verify hydraulic power unit outputs, as well as test machinery and tools for proper fluid flow rates.

### Rugged and Reliable

These meters are constructed with all metal pressure vessels that allow safe & permanent installation.

### High Pressure Operation

The magnetically coupled follower design allows operation to 6000 PSIG and use with liquids.

### Multiple Ports Available

Standard selection of NPT, SAE and BSPP ports reduces the amount of adapters required for installation.

## MATERIALS OF CONSTRUCTION (NON-WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Window Tube	Pyrex®	Pyrex®	Pyrex®
Window Seals	PTFE	PTFE	PTFE

*Pyrex is a registered trademark of Corning Incorporated.*

## MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Casing & End Ports	Anodized Aluminum	Brass	Stainless Steel
Seals	ERP with PTFE backup FKM or FFKM optional		
Transfer Magnet	PTFE coated Alnico	PTFE coated Alnico	PTFE coated Alnico
All other internal parts	Stainless Steel	Stainless Steel	Stainless Steel

# PHOSPHATE ESTER FLOW METERS

Compatible with aviation lubricants such as Skydrol®, and fire-retardant fluids such as Pydrau®, Fyrquil® and Houghton 900 series.

## PART NUMBER GUIDE

-    -     -

**PHOSPHATE ESTER**

**PORT SIZE RANGE**

1/4" - 1/2" =

3/4" - 1" =

1-1/4 - 2" =

**MATERIAL**

Aluminum =

Brass =

Stainless Steel =

**MAX. PRESSURE RATING**

3500 psig (liquids, aluminum & brass) =

6000 psig (liquids, stainless steel) =

**FLUID MEDIA**

Phosphate Ester at 1.145 specific gravity =

**PORTING/THREAD TYPE**

(all female)

	Size	
1/4" NPTF, dry seal	3 only	= <input type="text" value="S"/>
3/8" NPTF, dry seal	3 only	= <input type="text" value="A"/>
1/2" NPTF, dry seal	3 only	= <input type="text" value="B"/>
3/4" NPTF, dry seal	4 only	= <input type="text" value="C"/>
1" NPTF, dry seal	4 only	= <input type="text" value="D"/>
#6 SAE, O-ring seal	3 only	= <input type="text" value="E"/>
#8 SAE, O-ring seal	3 only	= <input type="text" value="F"/>
#10 SAE, O-ring seal	3 only	= <input type="text" value="G"/>
#12 SAE, O-ring seal	4 only	= <input type="text" value="H"/>
#16 SAE, O-ring seal	4 only	= <input type="text" value="J"/>
1-1/4" NPTF, dry seal	5 only	= <input type="text" value="K"/>
1-1/2" NPTF, dry seal	5 only	= <input type="text" value="L"/>
2" NPTF, dry seal	5 only	= <input type="text" value="M"/>
#20 SAE, O-ring seal	5 only	= <input type="text" value="N"/>
#24 SAE, O-ring seal	5 only	= <input type="text" value="P"/>
#32 SAE, O-ring seal	5 only	= <input type="text" value="Q"/>
1/4" BSPP	3 only	= <input type="text" value="R"/>
3/8" BSPP	3 only	= <input type="text" value="T"/>
1/2" BSPP	3 only	= <input type="text" value="U"/>
3/4" BSPP	4 only	= <input type="text" value="V"/>
1" BSPP	4 only	= <input type="text" value="W"/>
1-1/4" BSPP	5 only	= <input type="text" value="X"/>
1-1/2" BSPP	5 only	= <input type="text" value="Y"/>
2" BSPP	5 only	= <input type="text" value="Z"/>

*Note: SAE porting not available in Brass. Consult factory for SAE brass monitor requirements.*

**SPECIAL SCALE/CUSTOM PRODUCT**

**OPTIONAL FLOW DIRECTIONS**

Standard Flow, Uni-Directional =


Reverse Flow =

**FLOW RANGES**

Liquid		Size	
0.1-.95 GPM	0.5-3.75 LPM	3 only	= <input type="text" value="0"/> <input type="text" value="1"/>
0.2-1.8 GPM	1.0-7.0 LPM	3 & 4	= <input type="text" value="0"/> <input type="text" value="2"/>
0.5-4.5 GPM	2.0-17.0 LPM	3 & 4	= <input type="text" value="0"/> <input type="text" value="5"/>
1-9.5 GPM	3.0-35.0 LPM	3 & 4	= <input type="text" value="1"/> <input type="text" value="0"/>
1-14 GPM	4.0-52.0 LPM	3 & 4	= <input type="text" value="1"/> <input type="text" value="5"/>
2-19 GPM	5.0-70.0 LPM	4 only	= <input type="text" value="2"/> <input type="text" value="0"/>
2-22 GPM	10.0-85.0 LPM	4 & 5	= <input type="text" value="2"/> <input type="text" value="5"/>
3-28 GPM	10.0-105.0 LPM	4 only	= <input type="text" value="3"/> <input type="text" value="0"/>
6-35 GPM	15.0-135.0 LPM	4 only	= <input type="text" value="4"/> <input type="text" value="0"/>
6-46 GPM	25.0-175.0 LPM	4 only	= <input type="text" value="5"/> <input type="text" value="0"/>
6-69 GPM	20.0-180.0 LPM	5 only	= <input type="text" value="7"/> <input type="text" value="5"/>
10-90 GPM	50-350 LPM	5 only	= <input type="text" value="8"/> <input type="text" value="8"/>
20-130 GPM	100-500 LPM	5 only	= <input type="text" value="9"/> <input type="text" value="9"/>

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4	Series 5	Series 5 (2" port only)
A	1-7/8" (48mm)	2-3/8" (60 mm)	3-1/2" (90mm)	3-1/2" (90mm)
B	6-9/16" (167mm)	7-5/32" (182mm)	10-1/8" (258mm)	12-5/8" (322mm)

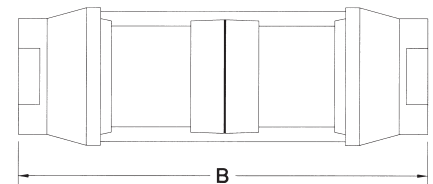

# CASE DRAIN FLOW METER

Low cost alternative for monitoring pump performance and identifying required maintenance.



## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

±5% of full scale

### Repeatability

±1% of full scale

### Flow Measuring Range

0.1-30 GPM (0.5-115 LPM)

### Maximum Operating Pressure

1000 PSIG (69 Bar)

### Maximum Operating Temperature

240°F (116°C)

### Standard Calibration Fluids

Oil meters: DTE 25® @ 110°F (43°C), 0.873 sg

Water meters: tap water @ 70°F (21°C), 1.0 sg

### Filtration Requirements

74 micron filter or 200 mesh screen minimum

### Viscosity

Standard viscosities up to 110 cSt. For viscosities between 110 to 430 cSt contact factory.

*DTE 25 is a registered trademark of Exxon Mobil.*

## MATERIALS OF CONSTRUCTION

Wetted Components		Non-Wetted Components	
Component	Materials	Component	Materials
Casing	Anodized Aluminum	Window Tube	Polycarbonate
Ports	Non-anodized Aluminum		
Seals	Buna-N®	Window Seals	Buna-N®
Transfer Magnet	PTFE coated Alnico		
All other internal parts	Stainless Steel		

## BENEFITS

### Unrestricted Mounting

Allows for horizontal, vertical or inverted installation and does not require straight plumbing on inlet or outlet.

### Superior Exterior Design


Weather-tight for use outdoors and/or on systems where wash-downs are required.

### Rugged and Reliable

These meters are constructed with all metal pressure vessels that allow safe and permanent installation.

### Multiple Ports Available

Standard selection of NPT, SAE and BSPP ports reduces the amount of adapters required for installation.

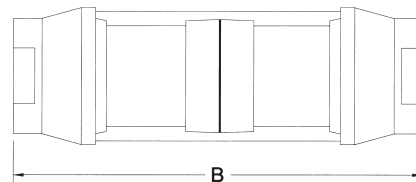

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4
A	1-7/8" (48mm)	2-3/8" (60 mm)
B	6-9/16" (167mm)	7-5/32" (182mm)

*SAE and BSPP porting also available. Contact factory for more information.*

# CASE DRAIN FLOW METER

Low cost alternative for monitoring pump performance and identifying required maintenance.

## PART NUMBER GUIDE

**CASE DRAIN**

**PORT/LINE SIZE RANGE**

1/2" NPTF = **3**  
 3/4" - 1" NPTF = **4**

**MATERIAL**

Aluminum = **A**

**PRESSURE RATING**

1000 psig = **5**

**FLUID MEDIA**

Oil = **H**  
 Water & 1.0 specific gravity = **W**

**THREAD TYPE**

**NON-ANODIZED STANDARD**

**Porting (All Female)**      **Size Code**



1/2" NPTF, dry seal = **B**    3 Only  
 3/4" NPTF, dry seal = **C**    4 Only  
 1" NPTF, dry seal    = **D**    4 Only

**FLOW RANGES (OIL & WATER)**

Liquid	Size	
0.1-1.0 GPM    0.5-4 LPM	3 Only	= <b>0 1</b>
0.2-2.0 GPM    1-8 LPM	3 & 4	= <b>0 2</b>
0.5-5.0 GPM    2-19 LPM	3 & 4	= <b>0 5</b>
1-10 GPM        5-37.5 LPM	3 & 4	= <b>1 0</b>
1-15 GPM        5-55 LPM	3 & 4	= <b>1 5</b>
2-20 GPM        10-75 LPM	4 Only	= <b>2 0</b>
2-25 GPM        10-95 LPM	4 Only	= <b>2 5</b>
4-30 GPM        15-115 LPM	4 Only	= <b>3 0</b>

SAE and BSPP porting also available for an additional charge. Contact factory for more information.

## TYPICAL PRESSURE DIFFERENTIALS



# PNEUMATIC FLOW METERS

Ideal for monitoring air compressor outputs, pneumatic tool air consumption and industrial gas flows.



## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

±2.5% of full scale in the center third of the measuring range;  
±4% in upper and lower thirds

### Repeatability

±1% of full scale

### Flow Measuring Range

2-1300 SCFM @ 100 PSIG  
(1-600 SLPS)

### Maximum Operating Pressure

Aluminum and brass meters: 600 PSIG (40 Bar)  
Stainless steel meters: 1000 PSIG (69 Bar)

### Maximum Operating Temperature

240°F (116°C) Note: For operation to 600°F (316°C), see our High Temperature data sheet.

### Standard Calibration Fluids

Air @ 70°F (21°C), 1.0 sg and 100 PSIG (6.8 Bar)

Consult factory for scale correction for application conditions & media.

### Filtration Requirements

74 micron filter or 200 mesh screen minimum

## BENEFITS

### Choice of Materials

Select from aluminum, brass or stainless steel to meet system and media compatibility requirements.

### Unrestricted Mounting

Allows for horizontal, vertical or inverted installation.

### Superior Exterior Design

Weather-tight for use outdoors and/or on systems where wash downs are required.

### Rugged and Reliable

These monitors are constructed with all metal pressure vessels, allowing safe, permanent installation in industrial systems.

### Multiple Ports Available

Standard selection of NPT, SAE and BSPP ports reduces the amount of adapters required for installation.

## MATERIALS OF CONSTRUCTION (NON-WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Window Tube	Polycarbonate	Polycarbonate	Polycarbonate
Window Seals	Buna-N®	Buna-N®	Buna-N®

## MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

	Aluminum	Brass	Stainless Steel
Casing & End Ports	Anodized Aluminum	Brass	Stainless Steel
Seals	Buna-N® (STD), EPR, FKM or FFKM	Buna-N® (STD), EPR, FKM or FFKM	FKM with PTFE backup (STD), Buna-N®, EPR or FFKM
Transfer Magnet	PTFE coated Alnico	PTFE coated Alnico	PTFE coated Alnico
All other internal parts	Stainless Steel	Stainless Steel	Stainless Steel

Buna-N is a registered trademark of Chemische Werke Huls.

# PNEUMATIC FLOW METERS

Ideal for monitoring air compressor outputs, pneumatic tool air consumption and industrial gas flows.

## PART NUMBER GUIDE

-    -     -

**PNEUMATIC**

**PORT SIZE RANGE**

1/4" - 1/2" =

3/4" - 1" =

1-1/4 - 2" =

**MATERIAL**

Aluminum =

Brass =

Stainless Steel =

**MAX. PRESSURE RATING**

600 psig (air & gas, aluminum & brass) =

1000 psig (air & gas, stainless steel) =

**FLUID MEDIA**

Air & Gases =

**PORTING/THREAD TYPE**

(all female)

	Size	
1/4" NPTF, dry seal	3 only	= <input type="text" value="S"/>
3/8" NPTF, dry seal	3 only	= <input type="text" value="A"/>
1/2" NPTF, dry seal	3 only	= <input type="text" value="B"/>
3/4" NPTF, dry seal	4 only	= <input type="text" value="C"/>
1" NPTF, dry seal	4 only	= <input type="text" value="D"/>
#6 SAE, O-ring seal	3 only	= <input type="text" value="E"/>
#8 SAE, O-ring seal	3 only	= <input type="text" value="F"/>
#10 SAE, O-ring seal	3 only	= <input type="text" value="G"/>
#12 SAE, O-ring seal	4 only	= <input type="text" value="H"/>
#16 SAE, O-ring seal	4 only	= <input type="text" value="J"/>
1-1/4" NPTF, dry seal	5 only	= <input type="text" value="K"/>
1-1/2" NPTF, dry seal	5 only	= <input type="text" value="L"/>
2" NPTF, dry seal	5 only	= <input type="text" value="M"/>
#20 SAE, O-ring seal	5 only	= <input type="text" value="N"/>
#24 SAE, O-ring seal	5 only	= <input type="text" value="P"/>
#32 SAE, O-ring seal	5 only	= <input type="text" value="Q"/>
1/4 BSPP	3 only	= <input type="text" value="&amp;"/>
3/8" BSPP	3 only	= <input type="text" value="R"/>
1/2" BSPP	3 only	= <input type="text" value="T"/>
3/4" BSPP	4 only	= <input type="text" value="U"/>
1" BSPP	4 only	= <input type="text" value="V"/>
1-1/4" BSPP	5 only	= <input type="text" value="W"/>
1-1/2" BSPP	5 only	= <input type="text" value="Y"/>
2" BSPP	5 only	= <input type="text" value="X"/>

**SPECIAL SCALE/CUSTOM PRODUCT**

**OPTIONAL FLOW DIRECTIONS**

Standard Flow, Uni-Directional =

Reverse Flow =

**FLOW RANGES**


Air		Size	
2-12 SCFM	1-5.50 SLPS	3 only	= <input type="text" value="0"/> <input type="text" value="1"/>
4-23 SCFM	2-10 SLPS	3 & 4	= <input type="text" value="0"/> <input type="text" value="2"/>
5-50 SCFM	3-23 SLPS	3 & 4	= <input type="text" value="0"/> <input type="text" value="5"/>
10-100 SCFM	6-48 SLPS	3 & 4	= <input type="text" value="1"/> <input type="text" value="0"/>
25-150 SCFM	10-70 SLPS	3 & 4	= <input type="text" value="1"/> <input type="text" value="5"/>
20-215 SCFM	10-100 SLPS	4 only	= <input type="text" value="2"/> <input type="text" value="0"/>
20-250 SCFM	15-120 SLPS	4 & 5	= <input type="text" value="2"/> <input type="text" value="5"/>
30-330 SCFM	15-150 SLPS	4 only	= <input type="text" value="3"/> <input type="text" value="0"/>
30-400 SCFM	15-180 SLPS	4 only	= <input type="text" value="4"/> <input type="text" value="0"/>
40-500 SCFM	30-230 SLPS	4 only	= <input type="text" value="5"/> <input type="text" value="0"/>
30-470 SCFM	30-210 SLPS	5 only	= <input type="text" value="5"/> <input type="text" value="0"/>
30-750 SCFM	25-350 SLPS	5 only	= <input type="text" value="7"/> <input type="text" value="5"/>
150-900 SCFM	50-450 SLPS	5 only	= <input type="text" value="8"/> <input type="text" value="8"/>
150-1300 SCFM	100-600 SLPS	5 only	= <input type="text" value="9"/> <input type="text" value="9"/>

Note: For special scales consult factory.

Note: SAE porting not available in Brass. Consult factory for SAE brass monitor requirements.

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4	Series 5	Series 5 (2" port only)
A	1-7/8" (48mm)	2-3/8" (60 mm)	3-1/2" (90mm)	3-1/2" (90mm)
B	6-9/16" (167mm)	7-5/32" (182mm)	10-1/8" (258mm)	12-5/8" (322mm)

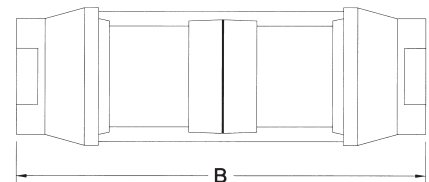



# FLOW RATE ALARMS

Ensures sufficient flows of coolants and lubricants in mobile hydraulic equipment and industrial process control.



## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

±2.0% of full scale

### Repeatability

±1% of full scale

### Flow Measuring Range

0.1-150 GPM (0.5-550 LPM)  
2.0-1300, SCFM (1-600 SLPS)

### Maximum Operating Pressure

#### Liquids

Aluminum and brass monitors:  
3500 PSIG (240 Bar)  
Stainless steel: 6000 PSIG (410 Bar)

#### Air/Gas

Aluminum and brass: 600 PSIG (40 Bar)  
Stainless steel: 1000 PSIG (69 Bar)

### Maximum Operating Temperature

Media: 185°F (85°C)  
Ambient: 185°F (85°C)

### Standard Calibration Fluids

Oil meters: DTE 25® @ 110°F (43°C), 0.873 sg  
Water meters: tap water @ 70°F (21°C), 1.0 sg  
Air meters: air @ 70°F (21°C), 1.0 sg and 100 PSIG (6.8 Bar)

### Alarm Switch Dead-band

4% of full scale

### Alarm Switch Contacts

SPDT (dry contact). 10 amps and 1/4 hp, 125 or 250 VAC. 1/2 amp, 125 VDC (regulated); 1/4 amp, 250 VDC (regulated); 3 amps, 125 VAC "L" (lamp load)

### Filtration Requirements

74 micron filter or 200 mesh screen minimum

### Viscosity

Standard viscosities up to 110 cSt. For viscosities between 110 to 430 cSt contact factory.

DTE 25 is a registered trademark of Exxon Mobil.

## BENEFITS

### Field Adjustable Alarm Setting

Only an allen wrench is required to change the flow alarm setting.

### Weather-Tight Construction

Rugged cast aluminum NEMA type 4X enclosure allows installation outdoors and in environments where liquid tight seals are required.

### Simple On/Off Logic

Positive alarm points using dry-contact, SPDT switches, reduce the complexity found in standard rotameter OFF/ON/OFF circuits.

### Pre-Wired with Cable Disconnect

The standard Hirschmann interconnection provides easy installation and maintenance of the Flow Alarm and the system it is a part of.

### Economical Protection

This monitor rapidly pays for itself as it "sounds the alarm" on incorrect pneumatic, lubrication or cooling volumes, protecting expensive equipment and reducing downtime.

## ENCLOSURE MATERIALS OF CONSTRUCTION (NON-WETTED COMPONENTS)

Enclosure & Cover	Painted Aluminum	Painted Aluminum	Painted Aluminum
Seals	Buna-N®	Buna-N®	Buna-N®
Window	Pyrex®	Pyrex®	Pyrex®
Din Connector	Polyamide	Polyamide	Polyamide

Buna-N is a registered trademark of Chemische Werke Huls. Pyrex® is a registered trademark of Corning Incorporated.

## FLOW METER MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

Casing & End Ports	Anodized Aluminum	Brass	Stainless Steel 303
Seals	Buna-N (STD), EPR, FKM or Kalrez®	Buna-N (STD), EPR, FKM or Kalrez®	FKM with PTFE backup (STD), Buna-N, EPR or Kalrez®
Transfer Magnet	PTFE coated Alnico	PTFE coated Alnico	PTFE coated Alnico
All other internal parts	Stainless Steel	Stainless Steel	Stainless Steel

Kalrez is a registered trademark of DuPont Incorporated.

# FLOW RATE ALARMS

Ensures sufficient flows of coolants and lubricants in mobile hydraulic equipment and industrial process control.

## PART NUMBER GUIDE

**METER STYLE**

Flow Alarm =  M\*  
(1 switch)

Flow Alarm =  N  
(2 switches)

\*For units which are to switch in the upper 2/3 of scale, add -A247 to end of M style part number

**PORTING/THREAD TYPE**

(all female)

1/4" NPTF, dry seal	3 only	=	<input type="checkbox"/> S
3/8" NPTF, dry seal	3 only	=	<input type="checkbox"/> A
1/2" NPTF, dry seal	3 only	=	<input type="checkbox"/> B
3/4" NPTF, dry seal	4 only	=	<input type="checkbox"/> C
1" NPTF, dry seal	4 only	=	<input type="checkbox"/> D
#6 SAE, O-ring seal	3 only	=	<input type="checkbox"/> E
#8 SAE, O-ring seal	3 only	=	<input type="checkbox"/> F
#10 SAE, O-ring seal	3 only	=	<input type="checkbox"/> G
#12 SAE, O-ring seal	4 only	=	<input type="checkbox"/> H
#16 SAE, O-ring seal	4 only	=	<input type="checkbox"/> J
1-1/4" NPTF, dry seal	5 only	=	<input type="checkbox"/> K
1-1/2" NPTF, dry seal	5 only	=	<input type="checkbox"/> L
2" NPTF, dry seal	5 only	=	<input type="checkbox"/> M
#20 SAE, O-ring seal	5 only	=	<input type="checkbox"/> N
#24 SAE, O-ring seal	5 only	=	<input type="checkbox"/> P
#32 SAE, O-ring seal	5 only	=	<input type="checkbox"/> Q
1/4 BSPP	3 only	=	<input type="checkbox"/> &
3/8" BSPP	3 only	=	<input type="checkbox"/> R
1/2" BSPP	3 only	=	<input type="checkbox"/> T
3/4" BSPP	4 only	=	<input type="checkbox"/> U
1" BSPP	4 only	=	<input type="checkbox"/> V
1-1/4" BSPP	5 only	=	<input type="checkbox"/> W
1-1/2" BSPP	5 only	=	<input type="checkbox"/> Y
2" BSPP	5 only	=	<input type="checkbox"/> X

Note: SAE porting not available in Brass.

**SPECIAL SCALE/CUSTOM PRODUCT**

**OPTIONAL FLOW DIRECTIONS**

Standard Flow, Uni-Directional =

Reverse Flow =  R  F

**PORT SIZE RANGE**

1/4" - 1/2" =  3

3/4" - 1" =  4

1-1/4" - 2" =  5

**MATERIAL**

Aluminum =  A

Brass =  B

Stainless Steel =  S

**MAX. PRESSURE RATING**

600 psig (air & gas, aluminum & brass) =  4

1000 psig (air & gas, stainless steel) =  5

3500 psig (liquids, aluminum & brass) =  6

6000 psig (liquids, stainless steel) =  7

**FLUID MEDIA**

Air & Gases =  A

Oil @ 0.873 specific gravity =  H

Water @ 1.0 specific gravity =  W


Note: For special scales consult the factory.

**FLOW RANGES**

Liquid	Air	Size	=	<input type="checkbox"/>	<input type="checkbox"/>
0.1-1.0 GPM	2.0-12 SCFM	3 only	=	<input type="checkbox"/> 0	<input type="checkbox"/> 1
0.2-2.0 GPM	4-23 SCFM	3 & 4	=	<input type="checkbox"/> 0	<input type="checkbox"/> 2
0.5-5.0 GPM	5-50 SCFM	3 & 4	=	<input type="checkbox"/> 0	<input type="checkbox"/> 5
1-10 GPM	10-100 SCFM	3 & 4	=	<input type="checkbox"/> 1	<input type="checkbox"/> 0
1-15 GPM	25-150 SCFM	3 & 4	=	<input type="checkbox"/> 1	<input type="checkbox"/> 5
2-20 GPM	20-215 SCFM	4 only	=	<input type="checkbox"/> 2	<input type="checkbox"/> 0
2-25 GPM	20-250 SCFM	4 & 5	=	<input type="checkbox"/> 2	<input type="checkbox"/> 5
3-30 GPM	30-330 SCFM	4 only	=	<input type="checkbox"/> 3	<input type="checkbox"/> 0
4-40 GPM	30-400 SCFM	4 only	=	<input type="checkbox"/> 4	<input type="checkbox"/> 0
5-50 GPM	40-500 SCFM	4 only	=	<input type="checkbox"/> 5	<input type="checkbox"/> 0
5-50 GPM	30-470 SCFM	5 only	=	<input type="checkbox"/> 5	<input type="checkbox"/> 0
8-75 GPM	30-750 SCFM	5 only	=	<input type="checkbox"/> 7	<input type="checkbox"/> 5
10-100 GPM	150-900 SCFM	5 only	=	<input type="checkbox"/> 8	<input type="checkbox"/> 8
20-150 GPM	150-1300 SCFM	5 only	=	<input type="checkbox"/> 9	<input type="checkbox"/> 9

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4	Series 5	Series 5 (2" port only)
A	6-9/16" (167mm)	7-5/32" (182mm)	10-1/8" (258mm)	12-5/8" (322mm)
B	2-3/16" (56mm)	2-15/16" (75mm)	3-13/16" (97mm)	3-13/16" (97mm)
C	4" (101mm)	4-1/2" (114mm)	5-5/16" (135mm)	5-5/16" (135mm)
D	1-7/8" (47mm)	1-7/8" (47mm)	1-7/8" (47mm)	1-7/8" (47mm)
E	4-7/8" (128mm)	5" (127mm)	6-3/4" (172mm)	6-3/4" (172mm)
F	2-1/4" (57mm)	2-7/8" (73mm)	3-3/4" (95mm)	3-3/4" (95mm)

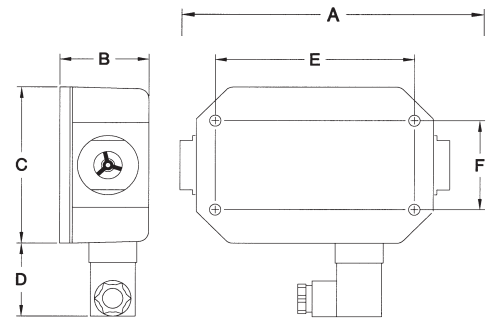

# FLOW RATE TRANSMITTERS

Ideal for batching, industrial process control, mobile hydraulic equipment and computer/PLC controlled hydraulic system monitoring applications.



## TECHNICAL SPECIFICATIONS

**Measuring Accuracy**  
±2.0% of full scale

**Repeatability**  
±1% of full scale

**Flow Measuring Range**  
0.1-150 GPM (0.5-550 LPM)  
2-1300 SCFM (1-600 SLPS)

**Standard Calibration Fluids**  
Oil monitors: DTE 25® @ 110°F (43°C), 0.873 sg  
Water monitors: tap water @ 70°F (21°C), 1.0 sg  
Air monitors: air @ 70°F (21°C), 1.0 sg and 100 PSIG (6.8 Bar)

**Maximum Operating Pressure**  
**Liquids**  
Aluminum and brass monitors:

3500 PSIG (240 Bar)  
Stainless steel: 6000 PSIG (410 Bar)

**Air/Gas**  
Aluminum and brass: 600 PSIG (40 Bar)  
Stainless steel: 1000 PSIG (69 Bar)

**Maximum Operating Temperature**  
Media: 185°F (85°C)  
Ambient: 185°F (85°C)

**Filtration Requirements**  
74 micron filter or 200 mesh screen minimum

**Viscosity**  
Standard viscosities up to 110 cSt. For viscosities between 110 to 430 cSt contact factory.

*DTE 25 is a registered trademark of Exxon Mobil.*

## BENEFITS

### Simple to Install

All transmitters are factory calibrated and ship fully assembled. Simply install the transmitter into your system and apply power. No straight plumbing required at inlet or outlet.

### Industry Standard Outputs

Transmitters provide proportional analog or pulse outputs that will drive popular data acquisition devices, meters and analog input cards.

### Direct Reading

All transmitters provide a visual indication of flow rate that matches the transmitted output.

### Weather-Tight Construction

The rugged cast aluminum enclosure is built to NEMA 4X standard and allows installation outdoors and in environments where liquid tight seals are required.

### Rugged and Reliable

Without delicate internal components to break, abrade or corrode, the flow transmitter will provide many years of low-maintenance service.

## ELECTRONIC TRANSMITTER PERFORMANCE

**Power Requirements**  
12-24 VDC, Regulated

**Load Driving capacity**  
4-20mA: Load resistance is dependent on power supply voltage.

Use the following equation to calculate maximum load resistance:  
Max Loop Load ( $\Omega$ ) = 50 (Power supply volts - 12).

0-5 VDC (regulated): Minimum load resistance 1000  $\Omega$ .

1-5 VDC\* (regulated): Minimum load resistance 25 K  $\Omega$

Square Wave Pulse: Minimum load resistance 1000  $\Omega$

**Transmission Distance**  
4-20mA and 1-5 VDC (regulated) are limited only by wire resistance and power supply voltage.  
<200 feet recommended for 0-5 VDC (regulated) and square wave pulse.

**Over-Current Protection**  
Self limiting at 35mA

**Resolution**  
10-bit (0.1%)

**Response Time**  
<100 milliseconds

*\*The 1-5 VDC output requires an external 249 ohm resistor (not included with transmitter) to be wired at the receiving device.*

# FLOW RATE TRANSMITTERS

Ideal for batching, industrial process control, mobile hydraulic equipment and computer/PLC controlled hydraulic system monitoring applications.

## ENCLOSURE MATERIALS OF CONSTRUCTION (NON-WETTED COMPONENTS)


Enclosure & Cover	Painted Aluminum	Painted Aluminum	Painted Aluminum
Seals	Buna-N®	Buna-N®	Buna-N®
Window	Pyrex®	Pyrex®	Pyrex®
Din Connector	Polyamide	Polyamide	Polyamide

Buna-N is a registered trademark of Chemische Werke Huls. Pyrex® is a registered trademark of Corning Incorporated.

## FLOW METER MATERIALS OF CONSTRUCTION (WETTED COMPONENTS)

Casing & End Ports	Anodized Aluminum	Brass	Stainless Steel 303
Seals	Buna-N (STD), EPR, FKM or Kalrez®	Buna-N (STD), EPR, FKM or Kalrez®	FKM with PTFE backup (STD), Buna-N, EPR or Kalrez®
Transfer Magnet	PTFE coated Alnico	PTFE coated Alnico	PTFE coated Alnico
All other internal parts	Stainless Steel	Stainless Steel	Stainless Steel

Kalrez is a registered trademark of DuPont Incorporated.

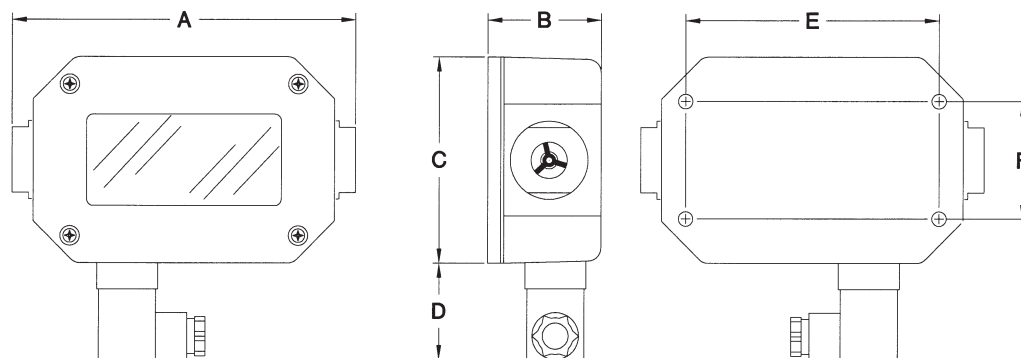

## MECHANICAL - SIZE CODE

DIM	Series 3	Series 4	Series 5	Series 5 (2" port only)
A	6-9/16" (167mm)	7-5/32" (182mm)	10-1/8" (258mm)	12-5/8" (322mm)
B	2-3/16" (56mm)	2-15/16" (75mm)	3-13/16" (97mm)	3-13/16" (97mm)
C	4" (101mm)	4-1/2" (114mm)	5-5/16" (135 mm)	5-5/16" (135mm)
D	1-7/8" (47mm)	1-7/8" (47mm)	1-7/8" (47mm)	1-7/8" (47mm)
E	4-7/8" (128mm)	5" (127mm)	6-3/4" (172mm)	6-3/4" (172mm)
F	2-1/4" (57mm)	2-7/8" (73mm)	3-3/4" (95mm)	3-3/4" (95mm)

# FLOW RATE TRANSMITTERS

Ideal for batching, industrial process control, mobile hydraulic equipment and computer/PLC controlled hydraulic system monitoring applications.

## PART NUMBER GUIDE

-    -     -

**TRANSMITTER**

**PORT SIZE RANGE**

1/4" - 1/2" =

3/4" - 1" =

1-1/4" - 2" =

**MATERIAL**

Aluminum =

Brass =

Stainless Steel =

**MAX. PRESSURE RATING**

600 psig (air & gas, aluminum & brass) =

1000 psig (air & gas, stainless steel) =

3500 psig (liquids, aluminum & brass) =

6000 psig (liquids, stainless steel) =

**FLUID MEDIA**

Air & Gases =

Oil @ 0.873 specific gravity =

Water @ 1.0 specific gravity =

Note: For special scales consult the factory.

**PORTING/THREAD TYPE**

(all female)

1/4" NPTF, dry seal	3 only	=	<input type="text" value="S"/>
3/8" NPTF, dry seal	3 only	=	<input type="text" value="A"/>
1/2" NPTF, dry seal	3 only	=	<input type="text" value="B"/>
3/4" NPTF, dry seal	4 only	=	<input type="text" value="C"/>
1" NPTF, dry seal	4 only	=	<input type="text" value="D"/>
#6 SAE, O-ring seal	3 only	=	<input type="text" value="E"/>
#8 SAE, O-ring seal	3 only	=	<input type="text" value="F"/>
#10 SAE, O-ring seal	3 only	=	<input type="text" value="G"/>
#12 SAE, O-ring seal	4 only	=	<input type="text" value="H"/>
#16 SAE, O-ring seal	4 only	=	<input type="text" value="J"/>
1-1/4" NPTF, dry seal	5 only	=	<input type="text" value="K"/>
1-1/2" NPTF, dry seal	5 only	=	<input type="text" value="L"/>
2" NPTF, dry seal	5 only	=	<input type="text" value="M"/>
#20 SAE, O-ring seal	5 only	=	<input type="text" value="N"/>
#24 SAE, O-ring seal	5 only	=	<input type="text" value="P"/>
#32 SAE, O-ring seal	5 only	=	<input type="text" value="Q"/>
1/4" BSPP	3 only	=	<input type="text" value="R"/>
3/8" BSPP	3 only	=	<input type="text" value="T"/>
1/2" BSPP	3 only	=	<input type="text" value="U"/>
3/4" BSPP	4 only	=	<input type="text" value="V"/>
1" BSPP	4 only	=	<input type="text" value="W"/>
1-1/4" BSPP	5 only	=	<input type="text" value="X"/>
1-1/2" BSPP	5 only	=	<input type="text" value="Y"/>
2" BSPP	5 only	=	<input type="text" value="Z"/>
Cartridge			<input type="text" value="Z"/>

**SPECIAL SCALE/CUSTOM PRODUCT**

**OPTIONAL FLOW DIRECTIONS**

Standard Flow, Uni-Directional =

Reverse Flow =

**FLOW RANGES**

Liquid	Air	Size		
0.1-1.0 GPM	2-12 SCFM	3 only	=	<input type="text" value="0"/> <input type="text" value="1"/>
0.2-2.0 GPM	4-23 SCFM	3 & 4	=	<input type="text" value="0"/> <input type="text" value="2"/>
0.5-5.0 GPM	5-50 SCFM	3 & 4	=	<input type="text" value="0"/> <input type="text" value="5"/>
1-10 GPM	10-100 SCFM	3 & 4	=	<input type="text" value="1"/> <input type="text" value="0"/>
1-15 GPM	25-150 SCFM	3 & 4	=	<input type="text" value="1"/> <input type="text" value="5"/>
2-20 GPM	20-215 SCFM	4 only	=	<input type="text" value="2"/> <input type="text" value="0"/>
2-25 GPM	20-250 SCFM	4 & 5	=	<input type="text" value="2"/> <input type="text" value="5"/>
3-30 GPM	30-330 SCFM	4 only	=	<input type="text" value="3"/> <input type="text" value="0"/>
4-40 GPM	30-400 SCFM	4 only	=	<input type="text" value="4"/> <input type="text" value="0"/>
5-50 GPM	40-500 SCFM	4 only	=	<input type="text" value="5"/> <input type="text" value="0"/>
5-50 GPM	30-470 SCFM	5 only	=	<input type="text" value="5"/> <input type="text" value="0"/>
8-75 GPM	30-750 SCFM	5 only	=	<input type="text" value="7"/> <input type="text" value="5"/>
10-100 GPM	150-900 SCFM	5 only	=	<input type="text" value="8"/> <input type="text" value="8"/>
20-150 GPM	150-1300 SCFM	5 only	=	<input type="text" value="9"/> <input type="text" value="9"/>

Note: SAE porting not available in Brass. Consult factory for SAE brass monitor requirements.

# HYDRAULIC SYSTEM TEST ANALYZER

Used to diagnose faults in hydraulic circuits, determine horsepower and test for component wear and cylinder leakage.



## TECHNICAL SPECIFICATIONS

### Measuring Accuracy

Flow:  $\pm 2\%$  of full scale  
 Pressure:  $\pm 2.5\%$  of full scale  
 Temperature:  $\pm 2.5\%$  of full scale

### Repeatability

$\pm 1\%$  of full scale - all measurements

### Flow Measuring Range

Flow: 0.1-150 GPM (0.5-550 LPM)  
 Temperature: 0-250°F (-20-120°C)

### Maximum Operating Pressure

Aluminum meters: 3000 PSIG (200 Bar)  
 Stainless steel meters: 5000 PSIG (340 Bar)

**Maximum Operating Temperature**  
 240°F (116°C)

### Standard Calibration Fluid

Oil meters: DTE 25® @ 110°F (43°C),  
 0.873 sg

### Filtration Requirements

74 micron filter or 200 mesh screen minimum

### Viscosity

Standard viscosities up to 110 cSt.

*DTE 25 is a registered trademark of Exxon Mobil.*

## MATERIALS OF CONSTRUCTION

Wetted Components		Non-Wetted Components	
Component	Materials	Component	Materials
Needle Valve	Carbon Steel	Window Tube	Polycarbonate
Casing and End ports	Anodized Aluminum (3000 PSIG) Stainless Steel (5000 PSIG)	Window Tube Seals	Buna-N®
Seals	Buna-N® (STD), FKM, EPR, Neoprene optional	Gauge	Brass and Stainless Steel
Transfer Magnet	PTFE coated Alnico	Gauge Window	Acrylic
All other internal parts	Stainless Steel		

*Buna-N is a registered trademark of Chemische Werke Huls.*

## BENEFITS

### A Complete Troubleshooting System

Style K consists of the flow meter, precision needle-type load valve and Glycerin filled gauge. Style T adds a Thermowell protected temperature gauge.

### Planned Component Repairs

This system analyzer can be part of a predictive maintenance program, allowing strategized pump, valve, motor and cylinder rebuilding.

### Compact and Rugged

The complete hydraulic system test analyzer is small enough to fit in a tool box and built to withstand rigorous industrial use.

### Non-Electrical

Without batteries to fail or other electrical power connections to make, this system will provide a lifetime of simple and reliable operation.

### Metric and US/Standard Measuring Ranges

These multi-measurement analyzers simultaneously measure flow in GPM and LPM, pressure in PSIG and Bar, and temperature in degrees F and C.

### Unrestricted Mounting

Accurate measurements can be taken in any mounting orientation, without the straight plumbing required with other analyzer systems.


### Reverse Flow Option Available

Optional built-in reverse bypass mechanism prevents potential damage from mis-installation or backflow.


# HYDRAULIC SYSTEM TEST ANALYZER

Used to diagnose faults in hydraulic circuits, determine horsepower and test for component wear and cylinder leakage.



## HYDRAULICS DIAGNOSTICS TOOL KIT APPLICATIONS

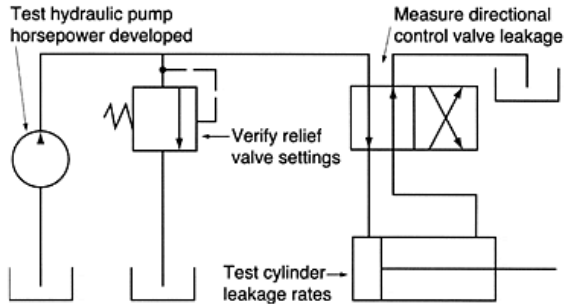

## K-STYLE

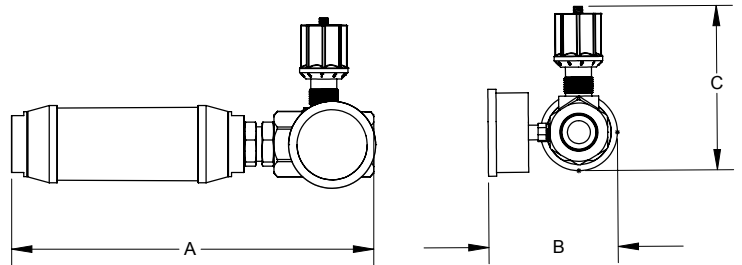

## T-STYLE

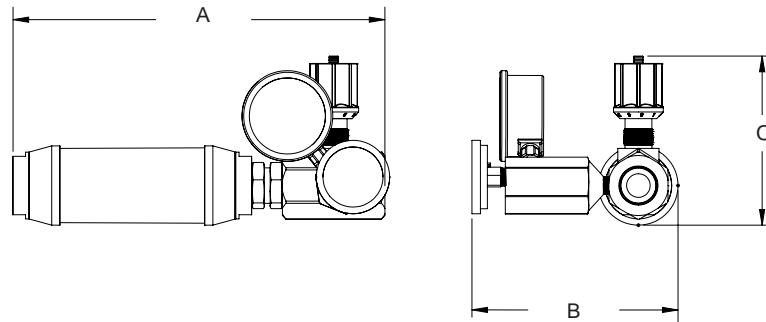

## GENERAL DIMENSIONS

(Measurements may vary from meter to meter)

DIM	Series 3	Series 3	Series 4	Series 4	Series 5	Series 5
Port Sizes	3/8" + #6 SAE	1/2" + #8 SAE	3/4" + #12 SAE	1" + #16 SAE	1-1/4" + #20 SAE	1-1/2" + 24 SAE
A	9.75" (248mm)	10.15" (258mm)	11.14" (283mm)	12.7" (323mm)	15.85" (403mm)	15.85" (403mm)
B (K-Style)	3.44" (87mm)	3.54" (90mm)	3.98" (101mm)	4.08" (104mm)	4.84" (123mm)	5.04" (128mm)
B (T-Style)	5.64" (143mm)	5.74" (146mm)	6.18" (157mm)	6.28" (160mm)	7.04" (179mm)	7.24" (184mm)
C	4.11" (104mm)	4.53" (115mm)	5.07" (129mm)	5.88" (149mm)	6.64" (169mm)	6.84" (174mm)



# HYDRAULIC SYSTEM TEST ANALYZER

Used to diagnose faults in hydraulic circuits, determine horsepower and test for component wear and cylinder leakage.

## PART NUMBER GUIDE



### HYDRAULIC TEST ANALYZERS

Temperature & Pressure =   
 Pressure =

### PORT SIZE RANGE

3/8" - 1/2" =   
 3/4" - 1" =   
 1-1/4" - 1-1/2" =

### MATERIAL

Aluminum =   
 Stainless Steel =

### MAX. PRESSURE RATING

3000 psig (liquids & aluminum) =   
 5000 psig (liquids, stainless steel) =

### FLUID MEDIA

Oil & 0.873 specific gravity =

*Note: For special scales consult factory.*

### PORTING/THREAD TYPE

(all female)

	Size	
1/4" NPTF, dry seal	3 only	= <input type="text" value="S"/>
3/8" NPTF, dry seal	3 only	= <input type="text" value="A"/>
1/2" NPTF, dry seal	3 only	= <input type="text" value="B"/>
3/4" NPTF, dry seal	4 only	= <input type="text" value="C"/>
1" NPTF, dry seal	4 only	= <input type="text" value="D"/>
#6 SAE, O-ring seal	3 only	= <input type="text" value="E"/>
#8 SAE, O-ring seal	3 only	= <input type="text" value="F"/>
#12 SAE, O-ring seal	4 only	= <input type="text" value="H"/>
#16 SAE, O-ring seal	4 only	= <input type="text" value="J"/>
1-1/4" NPTF, dry seal	5 only	= <input type="text" value="K"/>
1-1/2" NPTF, dry seal	5 only	= <input type="text" value="L"/>
#20 SAE, O-ring seal	5 only	= <input type="text" value="N"/>
#24 SAE, O-ring seal	5 only	= <input type="text" value="P"/>

### SPECIAL SCALE/CUSTOM PRODUCT

### OPTIONAL FLOW DIRECTIONS

Standard Flow, Uni-Directional =    
 Reverse Flow =

### FLOW RANGES

Liquid		Size	
0.1-1.0 GPM	0.5-4 LPM	3 only	= <input type="text" value="0"/> <input type="text" value="1"/>
0.2-2.0 GPM	1-8 LPM	3 & 4	= <input type="text" value="0"/> <input type="text" value="2"/>
0.5-5.0 GPM	2-19 LPM	3 & 4	= <input type="text" value="0"/> <input type="text" value="5"/>
1-10 GPM	5-37.5 LPM	3 & 4	= <input type="text" value="1"/> <input type="text" value="0"/>
1-15 GPM	5-55 LPM	3 & 4	= <input type="text" value="1"/> <input type="text" value="5"/>
2-20 GPM	10-75 LPM	4 only	= <input type="text" value="2"/> <input type="text" value="0"/>
2-25 GPM	10-95 LPM	4 & 5	= <input type="text" value="2"/> <input type="text" value="5"/>
4-30 GPM	15-115 LPM	4 only	= <input type="text" value="3"/> <input type="text" value="0"/>
4-40 GPM	20-150 LPM	4 only	= <input type="text" value="4"/> <input type="text" value="0"/>
6-50 GPM	20-190 LPM	4 & 5	= <input type="text" value="5"/> <input type="text" value="0"/>
6-75 GPM	30-280 LPM	5 only	= <input type="text" value="7"/> <input type="text" value="5"/>
10-100 GPM	50-375 LPM	5 only	= <input type="text" value="8"/> <input type="text" value="8"/>
25-150 GPM	100-550 LPM	5 only	= <input type="text" value="9"/> <input type="text" value="9"/>



# FLOWSTAT ES TURBINE FLOW SENSOR

Perfect monitoring solution for chillers/cooling circuits, HVAC, batching and industrial process control applications.



## TECHNICAL SPECIFICATIONS

**Measuring Accuracy**  
2% of full-scale

**Repeatability**  
±0.5% of full-scale

**Flow Measuring Range**  
0.5-15 GPM (2-60 LPM)  
With optional low-flow adapter:  
.25-4.5 GPM (1-17 LPM)

**Turn Down Ratio**  
10:1

**Maximum Operating Pressure**  
150 PSIG

**Maximum Operating Temperature**  
20-150°F

**Standard Calibration Fluid**  
Tap water @ 70°F Temperature (21°C),  
1.0 sg

**Filtration Requirement**  
150 Micron Filter recommended

## MATERIALS OF CONSTRUCTION

Wetted Components		Non-Wetted Components	
Component	Materials	Component	Materials
Casing	Glass-Filled Polypropylene	Encapsulant	Epoxy
Cover	Clear Polycarbonate	Strain Relief	Nylon
Seal	Buna-N® (Other options available)	Lock Ring	Glass-Filled Polypropylene
Impeller	Acetal Copolymer	Wire Insulation	High-Temperature PVC
Bearing	PEEK (Polyetheretherketone)		
Shaft	Stainless Steel		

*Buna-N is a registered trademark of Chemische Werke Huls.*

## BENEFITS

### Value Pricing

Low cost operation combined with low cost maintenance, equals better bottom line savings for your operation.

### Encapsulated Circuitry

Withstands the harshest environments.

### Several Outputs Available


The standard interface is a 2-wire, 4-20mA current loop. Sensor signal may be transmitted on a low cost wire without degradation. Pulse, relay and 0-5 VDC (regulated) are also available.

### Connects Directly to your Flow Monitoring Instruments

Can be connected directly to analog acquisition cards, chart recorders or other monitoring instruments, without external signal conditioning.

### Simply Plumb and Apply Power

Comes factory calibrated to your flow range specifications.

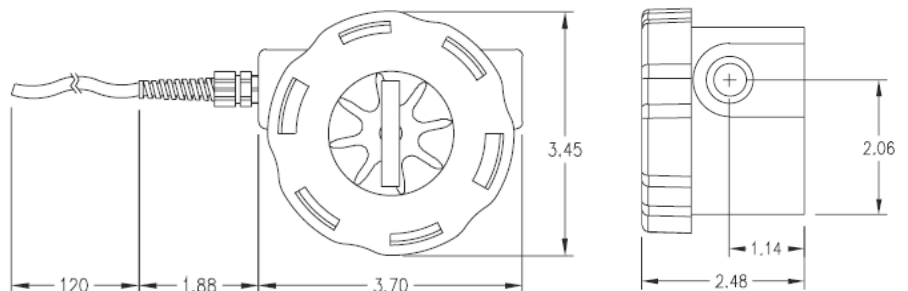


*Measurements shown in inches.*

# FLOWSTAT ES TURBINE FLOW SENSOR

Perfect monitoring solution for chillers/cooling circuits, HVAC, batching and industrial process control applications.

## PART NUMBER GUIDE

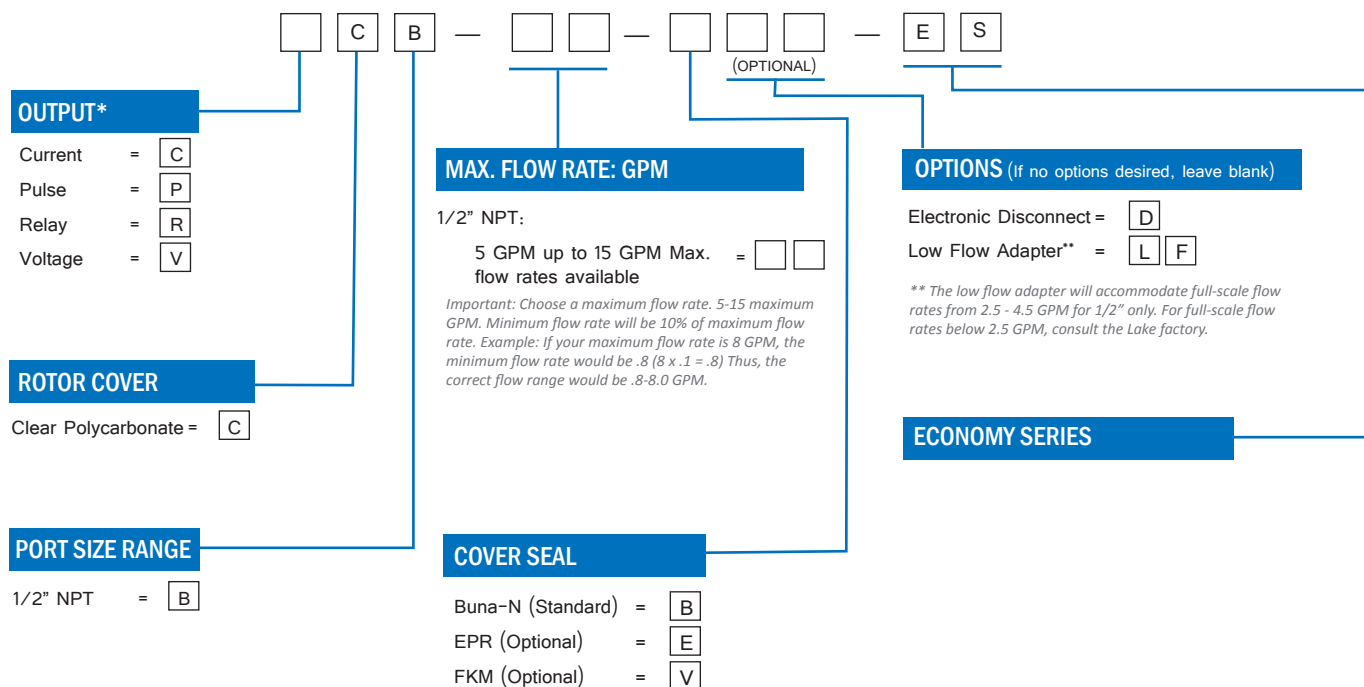

## ELECTRONIC SPECIFICATIONS

4-20 mA version	
Power Requirements	12-24 VDC, Regulated, Loop powered
Load driving capacity	Use the following equation to calculate maximum load resistance: Max Loop Load ( $\Omega$ ) = 50 (Power supply volts - 12).
Maximum Transmission Distance	Limited only by wire resistance & supply voltage
Response time	2 seconds to 90% (step change)
Resolution	Infinite
Over-current limit	Self limiting at 35 mA
Other protection	Reverse polarity


Relay Output	
Power Requirements	12-24 VDC, Regulated
Maximum Transmission Distance	200 feet recommended
Switch Contact	Form C, 5A max 120 or 240 VAC
Set Point Repeatability	1% of full scale

0-5 VDC (regulated) version	
Power Requirements	12-24 VDC, Regulated
Maximum Current	25 mA DC, Regulated
Minimum Load resistance	1000 Ohms
Maximum Transmission Distance	200 feet recommended
Resolution	Infinite
Response time	< 5 seconds to 90% (step change)

Pulse Output Version	
Power Requirements	12-24 VDC, Regulated
Response Time	<100 mS
Maximum Current	25 mA DC, Regulated
Maximum Transmission Distance	200 feet recommended
Minimum Load Resistance	1000 Ohms
Protection	Short circuit & reverse polarity

# FLOWSTAT TURBINE FLOW SENSOR

Perfect monitoring solution for chillers/cooling circuits, HVAC, medical equipment, batching and industrial process control applications.

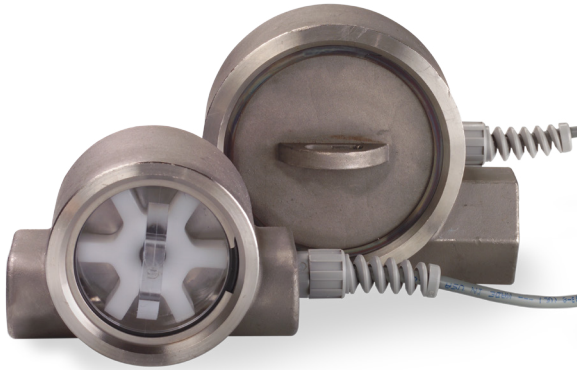

## TECHNICAL SPECIFICATIONS

**Measuring Accuracy**  
±2% of full scale

**Repeatability**  
±0.5% of full scale

**Flow Measuring Range**  
1/2" porting: 0.5-15 GPM (2-60 LPM)  
1/2" porting low flow option: 0.25-4.5 (1-17 LPM)  
3/4" - 1" porting: 1.5-50 GPM (60-200 LPM)

**Turn Down Ratio**  
10:1

**Fluid Temperature Range**  
20-225°F (-7° to 107°)

**Maximum Operating Pressure**  
to 200 PSIG (14 bar)

*With Optional Stainless Steel Cover:*  
to 500 PSIG (34 bar)

**Filtration Requirements**  
150 Micron filter recommended

**Standard Calibration Fluid**  
Water @ 70°F Temperature (21°C),  
1.0 sg

## BENEFITS

### Choice of Three Port Sizes

Select from 1/2", 3/4" or 1" NPT porting to meet system requirements.

**NOTE:** Using reduced ID fittings will affect calibrated range.

### Encapsulated Circuitry

Withstands the harshest environments.

### Several Outputs Available

The standard interface is a 2-wire, 4-20mA current loop. Sensor signal may be transmitted on a low cost wire without degradation. Pulse, relay and 0-5 VDC (regulated) are also available.

### Connects Directly to your Flow Monitoring Instruments

Can be connected directly to analog acquisition cards, chart recorders or other monitoring instruments, without external signal conditioning.

### Simply Plumb and Apply Power

Comes factory calibrated to your flow range specifications.

## MATERIALS OF CONSTRUCTION

### Wetted Components

Component	Materials
Casing	Stainless Steel 316
Cover	Clear polycarbonate (Optional Stainless Steel 316)
Seal	Buna-N® (other options available)
Impeller	Acetal Copolymer
Bearing	PEEK (Polyetheretherketone)
Shaft	316 Stainless Steel


### Non-Wetted Components

Component	Materials
Encapsulant	Epoxy
Strain Relief	Nylon
Lock Ring	Stainless Steel
Wire Insulation	High-Temperature PVC

*Buna-N is a registered trademark of Chemische Werke Huls.*

# FLOWSTAT TURBINE FLOW SENSOR

Perfect monitoring solution for chillers/cooling circuits, HVAC, medical equipment, batching and industrial process control applications.

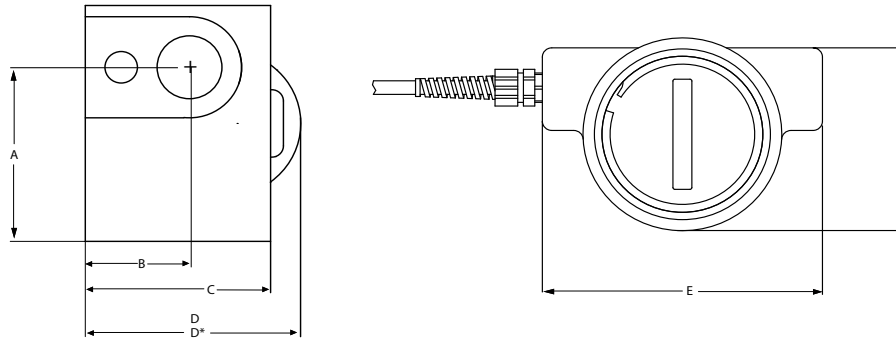

## MECHANICAL DIMENSIONS

DIM	1/2" NPTF	3/4" NPTF - 1" NPTF
A	1.94" (49mm)	3.06" (78mm)
B	1.13" (29mm)	1.33" (34mm)
C	2.00" (51mm)	2.46" (62mm)
D	2.45" (62mm)	2.78" (71mm)
D*	2.45" (62mm)	2.88" (73mm)
E	3.70" (94mm)	5.25" (133mm)
F	2.63" (67mm)	3.80" (97mm)

\*Dimensions with clear polycarbonate cover installed.

## ELECTRONIC SPECIFICATIONS

4-20 mA version		0-5 VDC (regulated) version	
Power Requirements	12-24 VDC, Regulated, Loop powered	Power Requirements	12-24 VDC, Regulated
Load driving capacity	Use the following equation to calculate maximum load resistance: Max Loop Load ( $\Omega$ ) = 50 (Power supply volts - 12).	Maximum Current	25 mA DC, Regulated
Maximum Transmission Distance	Limited only by wire resistance & supply voltage	Minimum Load resistance	1000 Ohms
Response time	2 seconds to 90% (step change)	Maximum Transmission Distance	200 feet recommended
Resolution	Infinite	Resolution	Infinite
Over-current limit	Self limiting at 35 mA	Response time	< 5 seconds to 90% (step change)
Other protection	Reverse polarity		
Relay Output		Pulse Output Version	
Power Requirements	12-24 VDC, Regulated	Power Requirements	12-24 VDC, Regulated
Maximum Transmission Distance	200 feet recommended	Response Time	<100 mS
Switch Contact	Form C, 5A max 120 or 240 VAC	Maximum Current	25 mA DC, Regulated
Set Point Repeatability	1% of full scale	Maximum Transmission Distance	200 feet recommended
		Minimum Load Resistance	1000 Ohms
		Protection	Short circuit & reverse polarity
		K-Factor	1/2" port $\approx$ 200 pulses/gallons 3/4" & 1" ports $\approx$ 60 pulses/gallons

# FLOWSTAT TURBINE FLOW SENSOR

Perfect monitoring solution for chillers/cooling circuits, HVAC, medical equipment, batching and industrial process control applications.

## PART NUMBER GUIDE

### OUTPUT

- Current =  C
- Pulse =  P
- Relay =  R
- Voltage =  V

### ROTOR COVER

- Clear Polycarbonate to 200 psi =  C
- 316 Stainless Steel to 500 psi =  S

### PORT SIZE RANGE

- 1/2" NPT =  B
- 3/4" NPT =  C
- 1" NPT =  D

### MAX. FLOW RATE: GPM

1/2" NPT:

- 5 GPM up to 15 GPM Max. =
- flow rates available

3/4" & 1" NPT:

- 15 GPM up to 50 GPM Max. =
- flow rates available

*\*Important: Choose a maximum flow rate. For 1/2" NPT: 5-15 maximum GPM. For 3/4" and 1" NPT: 15-50 maximum GPM. Minimum flow rate will be 10% of maximum flow rate. Example: If your maximum flow rate is 8 GPM, the minimum flow rate would be .8 (8 x .1 = .8) Thus, the correct flow range would be .8-8.0 GPM.*

### OPTIONS





- Control Cover =  C
- Electronic Disconnect =  D
- Low Flow Option\*\* =  L  F

*\*\* The low flow option will accommodate full-scale flow rates from 2.5 - 4.5 GPM for 1/2" only.*

### COVER SEAL

- Buna-N (Standard) =  B
- EPR (Optional) =  E
- FKM (Optional) =  V

## TYPICAL PRESSURE DIFFERENTIALS

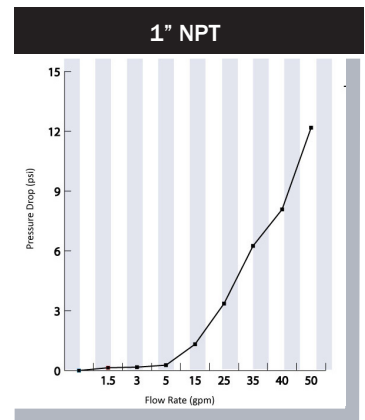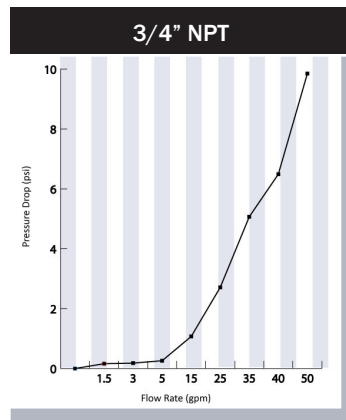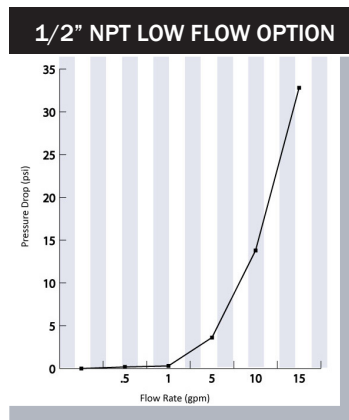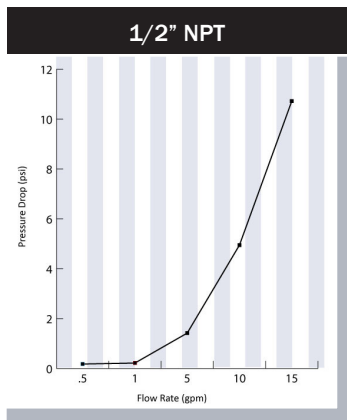

# WTA SERIES HYDRAULIC ANALYZER

Simple compact design allows for simultaneous measurement of flow, pressure and temperature on Mobile Industrial & Agricultural industries.



## BENEFITS

### Reversible Flow Indicator

The WTA will allow full flow to pass through in the reverse direction at low pressure but will not measure the reverse flow. This can be useful in situations when the flow and direction are uncertain or a cycle requires reversing, via the raising and lowering of a cylinder.

### Easy Connection & No Power Required

The WTA can be connected "In Line" between the pump and valve for convenient machine testing.

### Rugged and Reliable

Manufactured in a painted high quality steel case with removable lid. The WTA can withstand the most rigorous of use out in the field.

### Loading Valve

A loading valve allows you to simulate pressure on the hydraulic system without the need to operate all the machine functions in the workshop. The multi-stage valve design assures low handle effort and smooth operation over the entire flow and pressure range.

### Built-in Thermometer

Heat stressed hydraulic fluids can be a major factor in component failure. The thermometer, calibrated for both °F and °C is a carefully designed and integrated part of a high quality unit, not a bolted-on afterthought.

**NOTE: This unit is not designed for permanent installation.**

## FUNCTIONAL SPECIFICATIONS

### Measuring Accuracy

Flow:  $\pm 4\%$  of full scale  
Pressure:  $\pm 1.6\%$  of full scale  
Temperature:  $\pm 5^\circ\text{F}$  ( $\pm 2.5^\circ\text{C}$ )

### Flow Measuring Range

2-32 GPM (10-120 lpm)  
2-54 GPM (10-200 lpm)

### Maximum Operating Pressure

6000 PSIG (420 Bar)

### Standard Calibration Fluids

28cSt Oil

### Ambient Temperature

-10 to 50 °C (14 - 122 °F)

### Fluid Temperature

68 - 176°F (20 to 80°C) continuous use. Intermittently (< 10 minutes) up to 230°F (110°C).

### Fluid Type

Hydraulic oils

### Dimensions

310 x 105 x 120 mm (12-1/4" x 4-1/8" x 4-7/8")

### Weight

14.5 lbs ( 6.6kg)

### Accessories

A range of burst discs are available - please consult factory.

## TECHNICAL SPECIFICATIONS

Model Number	Flow Range		Inlet Fitting	Outlet Fitting
	lpm	gpm		
WTA32	10-120	2-32	1-5/16" - 12UN JIC Male	1-5/16" - 12UN JIC Male
WTA50	10-200	2-54	1-5/16" - 12UN JIC Male	1-5/16" - 12UN JIC Male

## MATERIALS OF CONSTRUCTION

Case	Painted steel - removable lid
RFI body	Aluminum 2011T6
Load valve body	Aluminum 2011T6
Internal components	Stainless Steel, Brass
Seals	Viton



По вопросам продаж и поддержки обращайтесь: [aen@nt-rt.ru](mailto:aen@nt-rt.ru)

[www.lake.nt-rt.ru](http://www.lake.nt-rt.ru)

Архангельск (8182)63-90-72,  
Астана+7(7172)727-132,  
Белгород(4722)40-23-64,  
Брянск(4832)59-03-52,  
Владивосток(423)249-28-31,  
Волгоград(844)278-03-48,  
Вологда(8172)26-41-59,  
Воронеж(473)204-51-73,  
Екатеринбург(343)384-55-89,  
Иваново(4932)77-34-06,  
Ижевск(3412)26-03-58,  
Казань(843)206-01-48,  
Калининград(4012)72-03-81,  
Калуга(4842)92-23-67,  
Кемерово(3842)65-04-62,  
Киров(8332)68-02-04,

Краснодар(861)203-40-90,  
Красноярск(391)204-63-61,  
Курск(4712)77-13-04,  
Липецк(4742)52-20-81,  
Магнитогорск(3519)55-03-13,  
Москва(495)268-04-70,  
Мурманск(8152)59-64-93,  
НабережныеЧелны(8552)20-53-41,  
НижнийНовгород(831)429-08-12,  
Новокузнецк(3843)20-46-81,  
Новосибирск(383)227-86-73,  
Орел(4862)44-53-42,  
Оренбург(3532)37-68-04,  
Пенза(8412)22-31-16,  
Пермь(342)205-81-47,  
Ростов-на-Дону(863)308-18-15,

Рязань(4912)46-61-64,  
Самара(846)206-03-16,  
Санкт-Петербург(812)309-46-40,  
Саратов(845)249-38-78,  
Смоленск(4812)29-41-54,  
Сочи(862)225-72-31,  
Ставрополь(8652)20-65-13,  
Тверь(4822)63-31-35,  
Томск(3822)98-41-53,  
Тула(4872)74-02-29,  
Тюмень(3452)66-21-18,  
Ульяновск(8422)24-23-59,  
Уфа(347)229-48-12,  
Челябинск(351)202-03-61,  
Череповец(8202)49-02-64,  
Ярославль(4852)69-52-93,